



Nylon plug Quattro

Application

- For anchoring in concrete, solid sand-lime brick, brick, natural stone and hollow building materials


Your advantages

- 4-way expansion for optimal transfer of the force into the building material
- Knotting in hollow building materials (gypsum plasterboard, lightweight building boards, perforated bricks) around the screw
- The collar on the head of the dowel prevents it from penetrating too deeply into the drill hole
- Suitable for using wood and chipboard screws

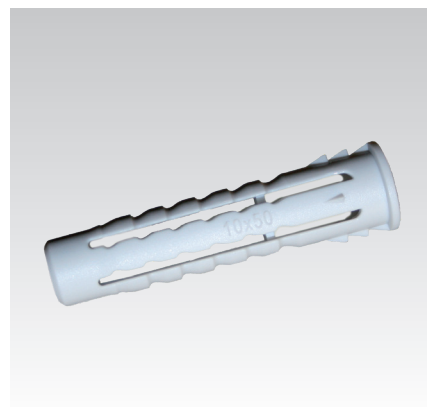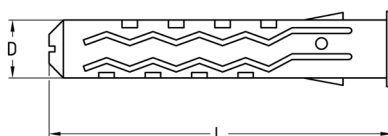

Features

Length L [mm]	Drilling diameter D [mm]	Drilling depth [mm]	Screw diameter [mm]	Max. recommended load		Part no.	Sales unit	Pack unit
				Concrete B25 [N]	Ventilated brick [N]			
30	6	40	4 - 5	700	100	179478	100	Pieces
40	8	50	4.5 - 6	800	220	179479		
50	10	70	6 - 8	1,400	260	179480	50	
60	12	80	8 - 10	1,820	300	179481	25	

 Only sizes 6 - 8 mm can be used in plasterboard and lightweight building boards. For size 8 mm, use a maximum screw diameter of 5 mm.

