


Nylon plug Quattro®

Application

- For anchorages in concrete, perforated brick, solid brick, lightweight concrete, calcium silicate brick and natural stone

Your advantages

- 4-way expansion for optimal transfer of the force into the building material
- Highest retaining values in the lower and middle load area, suitable for applications with chipboard screws
- Controlled screw-in depth
- Design prevents premature splaying while installing
- Rotation resistance stops the plug rotating in the drill hole

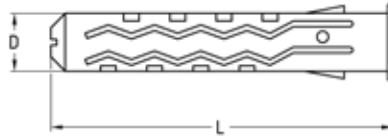

Features

Size	Length L [mm]	Drilling diameter D [mm]	Drilling depth [mm]	Screw diameter [mm]	Max. recommended tensile load					Part no.	Sales unit	Pack unit
					Uncracked concrete [kN]	Solid brick [kN]	Aerated concrete [kN]	Lime sand brick [kN]	Perforated brick ¹⁾ [kN]			
6 x 30	30	6	40	3.5 - 5	1.1	0.9	0.12	0.7	0.2	153560	100	Pieces
8 x 40	40	8	50	4.5 - 6	1.2	1	0.19	1	0.4	153561		
10 x 50	50	10	60	6 - 8	1.9	1.1	0.3	1.8	0.45	153562	50	
12 x 60	60	12	70	8 - 10	2.7	1.5	0.4	2.1	0.5	153563	25	
14 x 70	70	14	80	10 - 12	3	1.8	0.55	2.3	0.6	153564	10	

® Registered trademark of Mungo Befestigungstechnik AG

¹⁾ Size 6 x 30, 8 x 40, 10 x 50: chipboard screw



In the case of combinations of tensile and shear loads or shear loads with or without a lever arm, as well as reduced edge and axis distances (anchor groups), the values in this document must be reduced.

