


Ground consoles

Application

- Installation of pipes, external devices of air conditioners, heat pumps etc. on the ground or on flat roofs



Your advantages

- Easy installation on site
- Installation without penetrating the roof membrane
- Various sizes depending on the application and load case
- Integrated aluminium rail ensures straightforward use in outdoor areas
- Deinstallation at any time

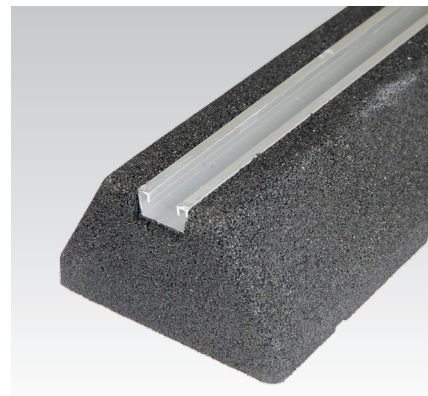


Features

| Length [mm] | Material | Temperature range | Max. recommended load per piece ¹⁾ [N] |
|-------------|---|-------------------|---|
| 250 | Recycled, UV-resistant styrene butadiene rubber | -35 °C to +80 °C | 1,600 |
| 400 | | | 2,400 |
| 600 | | | 4,500 |
| 1,000 | | | 6,450 |

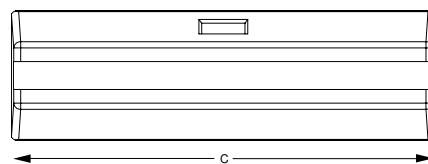

| Length [mm] | Dimensions [mm] | | | Weight [kg] | Part no. | Sales unit | Pack unit |
|-------------|-----------------|-----|-------|-------------|----------|------------|-----------|
| | A | B | C | | | | |
| 250 | 100 | 185 | 250 | 2.5 | 172844 | 1 | Pieces |
| 400 | | | 400 | 3.88 | 172845 | | |
| 600 | | | 600 | 5.9 | 171972 | | |
| 1,000 | | | 1,000 | 10.2 | 172053 | | |

¹⁾ Wind and snow loads need to be considered.

 Consoles are supplied without attachment material.

MPR-Hammer head fasteners

We recommend the following MPR-Hammer head fasteners for mounting ground consoles:

| Connecting thread | Length [mm] | Part no. | | |
|-------------------|-------------|------------|-------------------|--------|
| | | galvanised | zinc flake coated | V4A |
| M10 | 35 | 151062 | 154198 | 154418 |
| | 40 | 151063 | 154199 | |
| | 55 | 151064 | 154200 | |
| | 60 | 151065 | 154201 | |
| | 80 | 151066 | 154202 | |
| | 100 | 151067 | 154203 | |
| M12 | 40 | 151069 | 154204 | 154424 |
| | 55 | 151070 | 154205 | |
| | 60 | | 154206 | |
| | 80 | | 154207 | |
| | 100 | | 154208 | |

