OPTIMAL Junior® Easy

with DÄMMGULAST®, galvanised

Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Your advantages

- Practical latching fastener
- The pipe is free to move during the installation
- Quick installation due to the single fastening bolt
- Captive fastening bolt
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 17 dB(A)

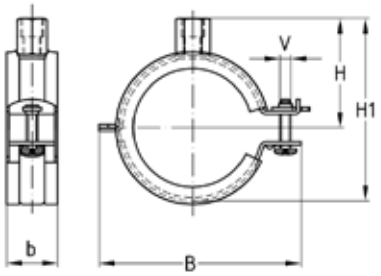

Features

Size	Max. recommended load [N]
¼" - 1½"	700
55 mm - 3"	800
102 mm - 4"	1,200

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b	B	H	H1	V	Part no.	Sales unit	Pack unit
M8	¼"		12 - 14	20	41	21	34	M5	**175045**	150	Pieces
	⅜"		15 - 19		45	23	38		**175046**		
	½"		21 - 23		50	25	42		**175047**	100	
	¾"		26 - 28			28	47		**175048**		
	1"		32 - 35		61	31	54		**175049**	50	
	1¼"		40 - 43		69	35	62		**175050**		
	1½"		48 - 51		77	39	70		**175051**		
		55	52 - 56		85	42	76		**175052**		
	2"		57 - 61		89	44	80		**175053**		
M8/M10	¼"		12 - 14		41	30	43		**175124**	150	
	⅜"		15 - 19		45	32	47		**175125**		
	½"		21 - 23		50	34	51		**175126**	100	
	¾"		26 - 28			37	56		**175127**		
	1"		32 - 35		61	40	63		**175128**	50	
	1¼"		40 - 43		69	44	71		**175129**		
	1½"		48 - 51		77	48	79		**175130**		
		55	52 - 56		85	51	85		**175131**		
	2"		57 - 61		89	53	89		**175132**		
		65	63 - 67		94	56	94		**175054**		
		72	70 - 73		102	60	102		**175055**		
	2½"		74 - 80		108	63	109		**175056**		
	3"		83 - 91		119	69	120		**175057**		
		102	101 - 106	23	139	78	139	M6	**175058**	25	
	4"		108 - 114		147	82	147		**175059**		

06/2026

© MÜPRO