


Spacer galvanised

Application

- For decoupled attachment of air ducts in connection with support channels
- Decoupling of frame constructions


Your advantages

- Easy and quick installation due to the pre-installed washer in the insulation part
- Protective grommet to prevent contact between the screw or threaded rod and the mounted object

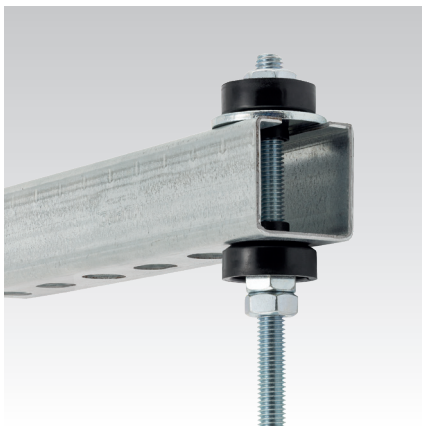

Features

Temperature range -30 °C to +60 °C

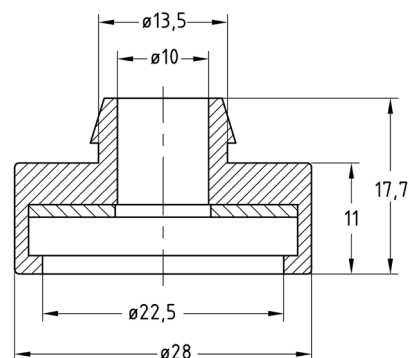

Connecting thread
M8/M10

Part no.
175723

Sales unit
100

Pack unit
Pieces