

## Big Foot 330

**Application**

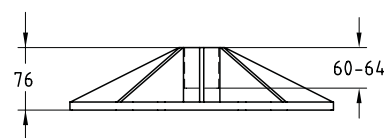
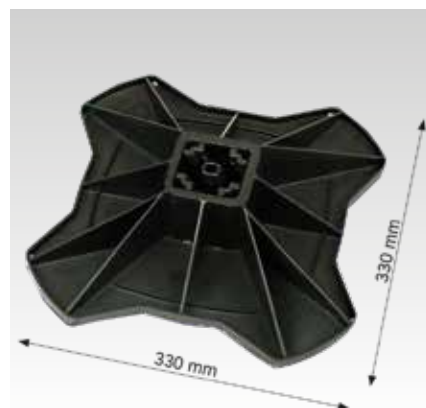
- Laying of pipelines, ventilation ducts on flat roofs

**Your advantages**

- Can be used very flexibly because it fits for 41/21, 38/40 or 41/41 rails
- Alternatively, a 40 x 40 mm square tube can also be used
- Prefabricated threaded hole allows use of a screw or threaded rod M12
- The standard MÜPRO fastening material for the corresponding rails can be used
- With roof pitches of 2.5° and 5°, an angled mat can be placed underneath to compensate
- Maximum stability, EPDM mat adapts optimally to uneven surfaces
- Optimum weight distribution over the entire foot surface



Angled mat 2.5°

**Features**

Material	Foot construction made of 100% recycled, glass fiber reinforced nylon
Temperature range	-40 °C to +80 °C
Max. recommended load per piece [N]	10,000

Type	Weight [kg]	Part no.	Sales unit	Pack unit
Big Foot 330	0.86	175964	1	Pieces
Angled mat 2.5°	0.5	175965		
Protective lining	0.08	176375		



When compensating for a roof pitch of 5°, two 2.5° slope blocks are placed one on top of the other!

All effects on the load-bearing building structure and the roof insulation must be checked on site.

The exact chemical composition of the roof membrane determines its susceptibility to polymer migration. Accordingly, the manufacturer of the roof membrane must provide information on its susceptibility to polymer migration and make specific recommendations.

To prevent polymer migration, we recommend placing a protective fleece underneath.