

Single bossed clamps

without lining, stainless steel

Application

- Suitable for installations without vibration control requirements
- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages


- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers



Features



Size	Max. recommended load [N]
1/4" - 1 1/2"	1,300
54 mm - 3"	1,500
102 mm - 6"	2,000

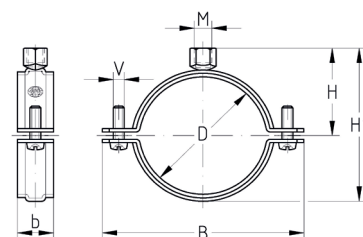

Connecting thread M	Size		Clamping range [mm]	Material	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]			b	B	H	H1	V			
M8/M10	¼"		12 - 14	V4A	20	47	16	26	M6 x 16	176023	150	Pieces
	⅜"		14 - 18			50	18	30		176024		
	½"		20 - 25			57	22	37		176025	100	
	¾"		26 - 31			64	25	43				
	1"		32 - 36			69	27	48		176027	50	
		40	38 - 43			76	31	55		176028		
	1¼"		40 - 46			79	32	58	M6 x 20	176029	50	
	1½"		47 - 51			85	35	63		176030		
		54	52 - 56			94	47	77		176031		
	2"		57 - 61			100	50	84		176032		
		63	63 - 67			105	52	89		176033		
		70	70 - 73			111	55	95		176034		
	2½"		74 - 80			118	59	102		176035	25	
	3"		83 - 91			129	64	113		176036		
		102	101 - 106			149	72	129	M6 x 25	176037		
	4"		108 - 114			157	76	137		176038		
		125	118 - 125			168	82	148		176039		
		133	131 - 135			179	87	158		176040		
	5"		136 - 142			185	90	165		176041		
		160	159 - 163			207	101	186		176042		
	6"		165 - 169			213	104	192		176043		

