





### MPT-Mounting base 500

#### Application

- Laying of pipelines, ventilation ducts on flat roofs

#### Your advantages

- Suitable for all MPT-Support profiles Q100
- The standard MÜPRO fastening material for the MPT-Support profiles can be used
- For compensation of roof pitch 2,5° and 5°, wedge mats can be placed underneath
- Incl. glued anti-vibration mat
- Easy to install

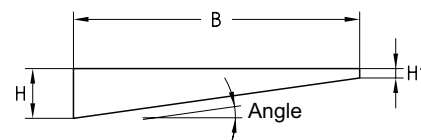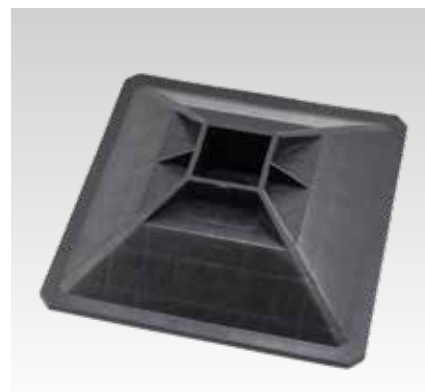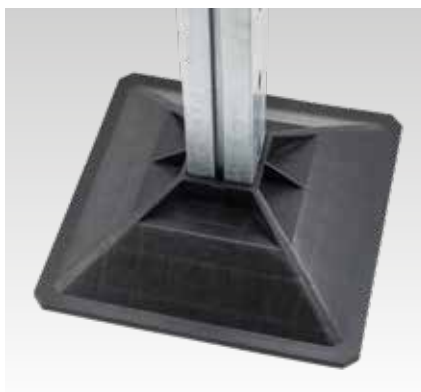

Wedge mats

#### Features

Material	100% recycled HDPE
Temperature range	-20 °C to +80 °C
Max. recommended load per piece [N]	16,000

Type	Dimensions [mm]					Weight [kg]	Part no.	Sales unit	Pack unit
	a	h	B	H	H1				
Mounting base 500	100	140	-	-	-	3.674	<b>180642</b>	2	Pieces
Wedge mat 500, 2.5°	-	-	500	36	15	5.9	<b>175978</b>	1	
Wedge mat 500, 5°	-	-		58	14	8.7	<b>175979</b>		
Protective lining	-	-	-	-	-	0.08	<b>176375</b>		

- ⚠ All effects on the load-bearing building structure and the roof insulation must be checked on site.
- The exact chemical composition of the roof membrane determines its susceptibility to polymer migration. Accordingly, the manufacturer of the roof membrane must provide information on its susceptibility to polymer migration and make specific recommendations.
- To prevent polymer migration, we recommend placing a protective fleece underneath.