

## Vibration control hangers

galvanised




## Application


- Vibration control of traverses and pipe bridges made of MPC-Support channels

## Your advantages


- Noise decoupling integrated into the hanger
- Very good vibration improvement of up to 17 dB(A) due to the highly elastic DÄMMGULAST® Spring element
- Attachment for threaded rods M8, M10 or alternatively for strip-mounting, depending on type
- The design for strip-mounting is also suitable for suspension attachment by means of hanger sockets
- Subsequent height adjustment of the threaded rods is possible

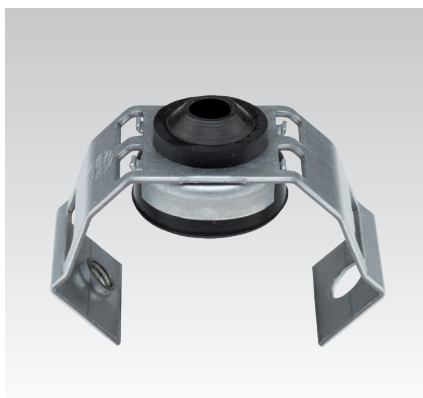


Vibration control hanger M8

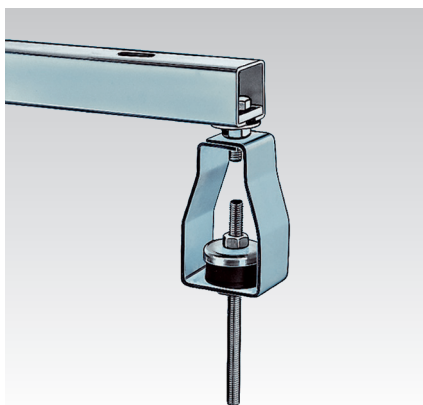


Vibration control hanger M10



For M8



For M10



For strip-mounting



Vibration control hanger for strip-mounting

## Features



Connection for	Threaded rods M8	Threaded rods M10	Strip-mounting, screws up to M8
Average vibration reduction [dB(A)]	16	17	16
Max. recommended load [N]	230	1,000	230

Connection for	Height [mm]	Part no.	Sales unit	Pack unit
Threaded rods M8	40	117736	100	Pieces
Threaded rods M10	110	117733		
Strip-mounting, screws up to M8	55	117728		