

OPTIMAL Junior®

with DÄMMGULAST®, galvanised

Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Your advantages

- Practical latching fastener
- Easy clicking-in of the fastening bolt with the tip of a finger
- High safety due to the positive-fit edge hook-in opening
- The pipe is free to move during the installation
- No inadvertent opening once it has clicked in, due to the safety latching fastener
- Quick installation due to the single fastening bolt
- The easy click-in fastener allows opening and closing of the pipe clamp with only one hand



- Captive fastening bolt
- Fastener retains the pipe securely even at the full opening angle of the clamp
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)




- Vibration control tested
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
12 mm - 1 1/4"	400
1 1/2" - 2"	500
70 - 83 mm	850
3" - 4"	1,000

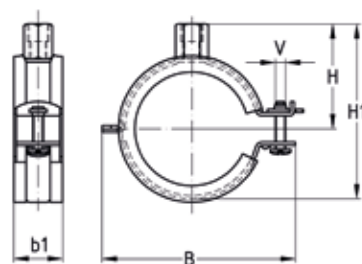

Connecting thread	Size		Clamping range	Dimensions [mm]					Part no.	Sales unit	Pack unit
M	[inch]	[mm]	[mm]	b1	B	H	H1	V			
M8		12	12 - 14	23	50	20	33	M5	141485	100	Pieces
	3/8"		15 - 18		54	22	37		136101		
	1/2"		19 - 22		58	24	41		136102		
	3/4"		23 - 27		63	27	46		136103		
		28	26 - 30		66	28	49		141486		
	1"		32 - 35		71	31	54		141487		
		40	37 - 41		77	33	60		141488	50	
	1 1/4"		42 - 46		82	36	65		141489		
	1 1/2"		48 - 51		88	39	71		141490		
M8/M10		55	53 - 58	28	94	51	86	141491			
	2"		59 - 64		101	54	93	141492			
		70	68 - 73		119	59	101	M6	119532		
	2 1/2"		74 - 80		126	62	108	119536			
		83	83 - 87		132	65	114	119540			
	3"		89 - 92		137	68	119	119544			
		102	100 - 104		148	73	130	119473			
		110	108 - 111		156	77	138	119477			
	4"		112 - 115		160	79	142	119481			