

Duo galvanised

Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Your advantages

- The easy to install quick fastening enables the efficient pipe support in any position
- Quick and reliable snapping in of the fastener once the clamp is closed, holding the pipe securely


- The easy to swivel lower clamp half allows opening and closing of the pipe clamp with only one hand
- Captive fastening bolts
- Wide opening of the clamp due to the swivelling ability of the lower clamp half
- Low vibration entry and exit areas due to the ribbed profile of the DÄMMGULAST® lining
- Connection thread M8/M10 for suspended, floor or wall mounting
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)



Features



Size	Max. recommended load [N]
12 mm - 2"	700
70 mm - 4"	1,000

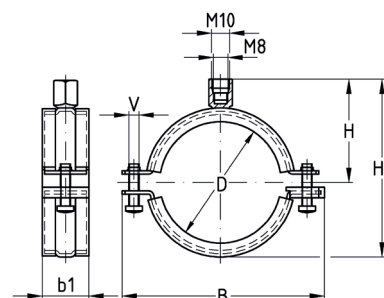

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10		12	12 - 15	22.5	45	28	38	M5	142938	1	Pieces
	3/8"		15 - 19		51	30	44		142939	100	
	1/2"		20 - 25		57	33	50		142940		
	3/4"		25 - 30		63	37	56		142941		
	1"		33 - 37		70	40	64		142942		
	1 1/4"		42 - 46		80	45	72		142943	50	
	1 1/2"		47 - 52		86	48	79		142944		
		57	54 - 58		91	50	84		142945		
	2"		59 - 63		96	53	88		142946		
		70	68 - 73		118	60	104	M6	142947		
	2 1/2"		72 - 80		127	65	113		142948		
		83	82 - 85		132	68	119		142949		
	3"		89 - 92		139	71	125		142950		
		102	99 - 103		151	77	137		142951		
		110	108 - 112		160	81	145		142952		
	4"		112 - 118		164	83	149		142953		