MÜPRO

Slide clamps

for plastic pipes, galvanised

Application

- Mounting of plastic pipes
- Gliding

Your advantages

- The special lining designed for smooth, noiseless sliding of plastic pipes
- With DÄMMGULAST® Compound vibration control lining for optimum structure-borne noise damping
- The positive-fit joining of lining and clamp prevents the lining from slipping out
- The security of the advanced OPTIMAL technology offers further advantages: Quick mounting due to practical, self-securing latch mechanism
  - No inadvertent opening once it has clicked in, due to the positive-fit edge hook-in opening
  - Tightening screw with combination, captive cross-head convenient for power driver

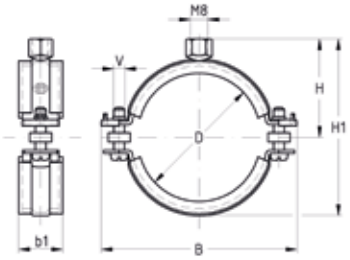

Features

Size [mm]	Max. recommended load [N]
16 - 40	800
50 - 63	1,690
75 - 110	2,320

Connecting thread M	Size [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8	16	23	57	28	45	M5	**119902**	100	Pieces
	20		63	31	51		**119906**		
	25		70	34	57		**119910**		
	32		76	38	65		**119914**		
	40		85	41	71		**119918**	50	
	50		93	45	79	M6	**119922**		
	56		100	49	86		**119926**		
	63		107	52	92		**119930**		
M8/M10	75	28	127	62	110		**119938**		
	90		139	68	122		**119942**		
	110		163	80	145		**119934**		

⚠ In order to prevent the tilling of the slide clamp, the following threaded rod lengths should not be exceeded:
Size 16 mm-50 mm: max. 80 mm
Size 56 mm-110 mm: max. 60 mm
The distances between supports recommended by the plastic pipe manufacturers must be observed.

© MÜPRO