

Application

- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes
- For indoor use

Your advantages

Economical solution due to advanced technology:

- Practical latching fastener
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Installation advantages of an one-piece clamp
- High safety due to the positive-fit edge hook-in opening
- The pipe is free to move during the installation
- No inadvertent opening once it has clicked in, due to the safety latching fastener




- Tightening bolts with combination, captive cross-head convenient for power driver
- DÄMMGULAST® vibration control lining with green identification stripe: average sound level improvement up to 18 dB(A)
- Optimum handling due to injury-proof design



Features



Size	Max. recommended load [N]
¼" - 1¼"	800
1½" - 70 mm	1,690
2½" - 116 mm	2,320
125 mm - 6"	2,696

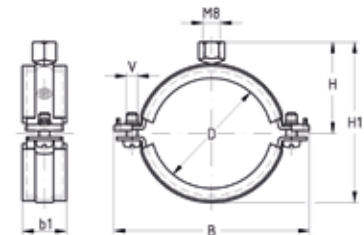


Connecting thread	Size		Clamping range [mm]	Dimensions [mm]				V	Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1				
M	M8	¼"	13 - 15	23	55	26	42	M5	119822	100	Pieces
		⅜"	16 - 18		57	28	45		119838		
		½"	19 - 24		63	31	51		119818		
		¾"	25 - 30		70	34	57		119834		
		1"	32 - 37		76	38	65		119806		
		1¼"	41 - 44		85	41	71		119814		
		1½"	48 - 51		93	45	79		119810		
			57		53 - 58	100	49		86	119842	
			70		60 - 63	107	52		92	119826	
					69 - 73	116	56		101	119846	
					74 - 78	127	58		106	119830	

- ⚠** The attachment of pipes, especially under the ceiling, often requires the use of two hands. It is then convenient, if the OPTIMAL latching fastener can be closed with only one hand. After closing the latch, the pipe is safely held in place but remains free to move. Consequently, adjustment of pipe can be made with two hands. And don't forget: high security due to the positive-fit edge hook-in opening.

OPTIMAL galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10	1/4"		13 - 15	23	55	30	46	M5	119866	100	Pieces
	3/8"		16 - 18		57	32	49		119882		
	1/2"		19 - 24		63	35	55		119862		
	3/4"		25 - 30		70	38	61		119878		
	1"		32 - 37		76	42	69		119850		
	1 1/4"		41 - 44		85	45	75		119858		
	1 1/2"		48 - 51		93	49	83		119854		
		57	53 - 58		100	53	90		119886		
	2"		60 - 63		107	56	96		119870		
		70	69 - 73		116	60	105		119894		
	2 1/2"		74 - 78		127	62	110		119874		
		83	80 - 84		132	66	117		119898		
	3"		88 - 90	139	68	122	119794				
		102	99 - 103	155	75	136	119770				
		110	108 - 112	163	80	145	119774				
	4"		113 - 117	168	82	150	119798				
		116	116 - 120	172	84	153	119778				
		125	125 - 129	174	89	164	119782				
		133	133 - 137	185	93	171	119786				
	5"		137 - 141	188	95	176	119802				
		160	159 - 162	212	106	197	119790				
	6"		164 - 168	220	108	202	119890				

 The attachment of pipes, especially under the ceiling, often requires the use of two hands. It is then convenient, if the OPTIMAL latching fastener can be closed with only one hand. After closing the latch, the pipe is safely held in place but remains free to move. Consequently, adjustment of pipe can be made with two hands. And don't forget: high security due to the positive-fit edge hook-in opening.