

Single bossed clamps

with DÄMMGULAST® blue, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- DÄMMGULAST® Vibration control lining with blue indicator stripe, fire class B1 in accordance with DIN 4102, non-dripping in a fire


- Average sound level improvement up to 16.5 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8" - 2"	1,500
70 - 83 mm	2,200
3" - 160 mm	2,900
180 - 200 mm	3,200
212 - 225 mm	5,800

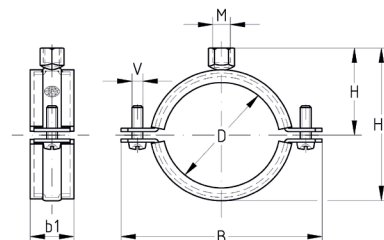

Connecting thread	Size		Clamping range	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10	3/8"		14 - 20	23	64	35.5	55	M6 x 20	151466	100	Pieces
	1/2"		21 - 26		71	38.5	61		151467		
	3/4"		26 - 30		75	40.5	65		151468		
	1"		31 - 38		81	43.5	71	M6 x 25	151469	50	
	1 1/4"		40 - 47		91	48.5	81		151471		
	1 1/2"		48 - 54		100	52.5	89		151472		
		57	54 - 60		105	55	94		151473		
	2"		60 - 66	111	58	100	151474				
	70"		68 - 73	28	126	62.5	109	M8 x 35	151476		
	2 1/2"		73 - 80		131	65	114		151477		
		83	82 - 87		142	70	124		M8 x 40	151478	
	3"		87 - 94		146	72	128	151479			
		102	99 - 104		157	77.5	139	151480			
		110	105 - 112		166	82	148	151481			
	4"		112 - 118		172	85	154	151482			
		125	122 - 128		182	90	164	151483			
		133	132 - 137		191	94.5	173	151484			
	5"		137 - 142		196	97	178	151485			
		144	142 - 148		202	100	184	151486			
		150	149 - 156		210	104	192	151487			
		160	159 - 164		218	108	200	151488			
M10/M12		180	177 - 183		46	235	122	223	M10 x 40	151516	25
		200	197 - 203	256		132	243	151517			
		212	208 - 214	284		138.5	256	151518			
	8"		217 - 225	295		144	267	151519			
		225	225 - 232	304		147.5	274	151520			



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.