

Single bossed clamps

with DÄMMGULAST® yellow, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter


- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8" - 2"	1,700
70 - 83 mm	2,200
3" - 6"	2,900
170 - 200 mm	3,500
212 - 225 mm	5,800

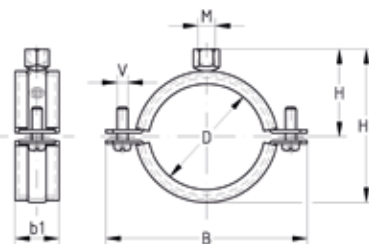

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10	⅜"		14 - 20	23	64	35.5	55	M6 x 20	151359	100	Pieces
	½"		21 - 26		71	38.5	61	M6 x 25	151360		
	¾"		26 - 30		75	40.5	65		151361		
	1"		31 - 38		81	43.5	71		151362		
	1¼"		40 - 47		91	48.5	81		151364	50	
	1½"		48 - 54		100	52.5	89		151365		
		57	54 - 60	28	105	55	94	151366			
	2"		60 - 66		111	58	100	151367			
		70	68 - 73		126	62.5	109	M8 x 35	151369		
	2½"		73 - 80		131	65	114	151370			
		83	82 - 87		142	70	124	151371			
	3"		87 - 94		146	72	128	M8 x 40	151372		
		102	99 - 104		157	77.5	139		151373		
		110	105 - 112		166	82	148		151374		
	4"		112 - 118		172	85	154		151375		
		125	122 - 128		182	90	164		151376		
		133	132 - 137		191	94.5	173		151377		
	5"		137 - 142		196	97	178		151378		
		144	142 - 148		202	100	184		151379		
		150	149 - 156		210	104	192		151380		
		160	159 - 164		218	108	200		151422		
	6"		164 - 169		223	110.5	205		151423		
		170	169 - 172		225	111.5	207		151424		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

Single bossed clamps with DÄMMGULAST® yellow, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M10/M12	3/8"		14 - 20	23	64	40.5	60	M6 x 20	151425	100	Pieces
	1/2"		21 - 26		71	43.5	66	M6 x 25	151426		
	3/4"		26 - 30		75	45.5	70		151427		
	1"		31 - 38		81	48.5	76		151428		
	1 1/4"		40 - 47		91	53.5	86		151430	50	
	1 1/2"		48 - 54		100	57.5	94		151431		
		57	54 - 60		105	60	99		151432		
	2"		60 - 66		111	63	105		151433		
		70	68 - 73	28	126	67.5	114	M8 x 35	151435		
	2 1/2"		73 - 80		131	70	119	151436			
		83	82 - 87		142	75	129	151437			
	3"		87 - 94		146	77	133	M8 x 40	151438		
		102	99 - 104		157	82.5	144	151439			
		110	105 - 112		166	87	153	151440			
	4"		112 - 118		172	90	159	151441			
		125	122 - 128		182	95	169	151442			
		133	132 - 137		191	99.5	178	151443			
	5"		137 - 142		196	102	183	151444			
		150	149 - 156		210	109	197	151446			
		160	159 - 164		218	113	205	151447			
	6"		164 - 169		223	115.5	210	151448			
		170	169 - 172		225	116.5	212	151449			
		180	177 - 183		235	122	223	151450	25		
		200	197 - 203		256	132	243	151451			
		212	208 - 214	46	284	138.5	256	M10 x 40		151452	
	8"		217 - 225		295	144	267	151453			
		225	225 - 232		304	147.5	274	151454			
M12/M16/1/2" ET		160	159 - 164	28	218	117	209	M8 x 40	151458	50	
	6"		164 - 169		223	119,5	214	151459			
			170		169 - 172	225	120,5	216	151460		
			180		177 - 183	235	126	227	151461		25
		200	197 - 203	256	136	247	151462				
		212	208 - 214	46	284	142,5	260	M10 x 40	151463		
	8"		217 - 225		295	148	271	151464			



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.