

Single bossed clamps

with DÄMMGULAST® red, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Suitable for fastening of drinking water and heating pipes as well as for thermal oil pipes
- Attachment of pipelines in increased temperature ranges
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- With high-temperature resistant DÄMMGULAST® Vibration control lining red


- The high-quality DÄMMGULAST® section maintains its properties in the temperature range -60 °C to +200 °C
- Average sound level improvement up to 24 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
3/8" - 2"	1,300
70 - 83 mm	1,900
3" - 4"	2,200
125 mm - 6"	2,700
8"	5,300

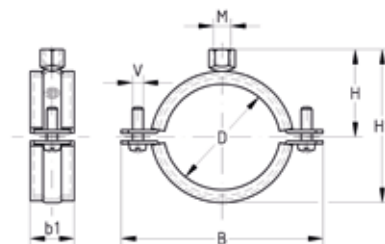

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10	⅜"		14 - 20	23	64	35.5	55	M6 x 20	151532	100	Pieces
	½"		21 - 26		71	38.5	61		151533		
	¾"		26 - 30		75	40.5	65		151534		
	1"		31 - 38		81	43.5	71	M6 x 25	151535		
	1¼"		40 - 47		91	48.5	81		151537	50	
	1½"		48 - 54		100	52.5	89		151538		
		57	54 - 60		105	55	94		151539		
	2"		60 - 66		111	58	100		151540		
		70	68 - 73	28	126	62.5	109	M8 x 35	151542		
	2½"		73 - 80		131	65	114		151543		
		83	82 - 87		142	70	124		151544		
	3"		87 - 94		146	72	128	M8 x 40	151545		

- ⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

Single bossed clamps

with DÄMMGULAST® red, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
M8/M10		102	99 - 104	28	157	77.5	139	M8 x 40	151546	50	Pieces
		110	105 - 112		166	82	148		151547		
	4"		112 - 118		172	85	154		151548		
		125	122 - 128		182	90	164		151549		
		133	132 - 137		191	94.5	173		151550		
	5"		137 - 142		196	97	178		151551		
		144	142 - 148		202	100	184		151552		
		150	149 - 156		210	104	192		151553		
		160	159 - 164		218	108	200		151554		
	6"		164 - 169		223	110.5	205		151555		
M10/M12	1"		31 - 38	23	81	48.5	76	M6 x 25	151560	100	Pieces
	1¼"		40 - 47		91	53.5	86		151562	50	
	1½"		48 - 54		100	57.5	94		151563		
	2"		60 - 66		111	63	105		151565		
	2½"		73 - 80	28	131	70	119	M8 x 35	151568	25	
	3"		87 - 94		146	77	133	M8 x 40	151570		
	4"		112 - 118		172	90	159	151573			
	5"		137 - 142		196	102	183	151576			
	6"		164 - 169		223	115.5	210	151580			
	8"		217 - 225		46	295	144	267	M10 x 40		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

