

Single bossed clamps

without lining, galvanised

Application

- Applicable as a pipeline anchor point from ½" to 1½"
- Suitable for installations without vibration control requirements
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages


- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts secured with captive washers
- Robust design
- Tightening bolts with combination cross-head convenient for power driver
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 210 mm and is submitted to controls according to RAL-GZ 655-B



Features



Size	Max. recommended load [N]
¾" - 70 mm	1,900
2½" - 174 mm	4,400
179 - 210 mm	5,000
223 - 241 mm	5,300

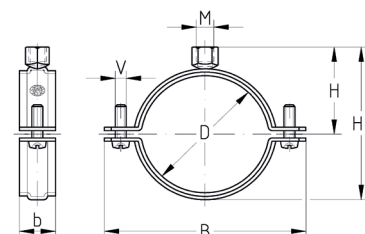

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit		
	[inch]	[mm]		b	B	H	H1	V					
M8/M10	⅜"		14 - 18	20	50	27.5	39	M6 x 20	151598	100	Pieces		
	½"		19 - 25		57	30.5	45		151599				
	¾"		26 - 30		64	35.5	55		151600				
	1"		31 - 37		71	38.5	61		151601				
		40	35 - 42		75	40.5	65		151602				
	1¼"	42.4	42 - 46		81	43.5	71		M6 x 25			151603	50
	1½"		47 - 52		87	46	76					151604	
		57	53 - 57		91	48.5	81					151605	
	2"		58 - 63		100	52.5	89					151606	
		70	64 - 71		105	55	94					151607	
	2½"		72 - 78	25	120	59.5	103	M8 x 35	151609				
		83	79 - 85		126	62.5	109		151610				
	3"		85 - 90		131	65	114		151611				
		98	94 - 99		142	70	124		151612				
		102	99 - 104		146	72	128	M8 x 40	151613				
	4"		108 - 115		157	77.5	139		151614				
		122	118 - 123		166	82	148		151615				
		125	125 - 130		172	85	154		151616				
	5"		133 - 140		182	90	164		151617				
		147	142 - 148		191	94.5	173		151618				
		152	148 - 153		196	97	178		151619				
		160	154 - 160		202	100	184		151620				
	6"		160 - 169		210	104	192		151621				
		174	170 - 175		218	108	200		151622				

⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

ℹ Please find additional information for the assembly of anchor and expansion points in chapter „Anchor points/expansion points“.

Single bossed clamps

without lining, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit						
	[inch]	[mm]		b	B	H	H1	V									
M10/M12	1"		31 - 37	20	71	43.5	66	M6 x 20	151625	100	Pieces						
		40	38 - 41		75	45.5	70		151626								
	1¼"	42.4	42 - 46		81	48.5	76		M6 x 25			151627	50				
	1½"		47 - 52	87	51	81	151628										
		57	53 - 57	91	53.5	86	151629										
	2"		58 - 63	100	57.5	94		151630	25								
		70	64 - 71	105	60	99		151631									
	2½"		72 - 78	25	120	64.5		108		M8 x 35		151633					
		83	79 - 85		126	67.5	114	151634									
	3"		85 - 90		131	70	119	151635									
		98	94 - 99	142	75	129	M8 x 40	151636		25							
		102	99 - 104	146	77	133		151637									
	4"		108 - 115	157	82.5	144		151638									
		122	118 - 123	166	87	153		151639				25					
		125	125 - 130	172	90	159		151640									
	5"		133 - 140	182	95	169		151641									
		147	142 - 148	191	99.5	178		151642						25			
		152	148 - 153	196	102	183		151643									
		160	154 - 160	202	105	189		151644									
	6"		160 - 169	210	109	197		151645							25		
		174	170 - 175	218	113	205		151646									
		179	175 - 180	223	115.5	210		151647									
	7"	190	187 - 194	235	122	223		151649					25				
		210	206 - 214	256	132	243		151650									
	M12/M16/½" ET		223	218 - 226	40	284		136	260							M10 x 40	159179
			234	227 - 235		295	142.5	271	159180								
			241	235 - 244		304	148	278	159181								



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.



Please find additional information for the assembly of anchor and expansion points in chapter „Anchor points/expansion points“.