

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for pipe attachments in industrial areas
- Specially suitable for standing fixings
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)




- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B

Features



Size	Max. recommended load [N]
½" - 2"	1,700
70 - 83 mm	2,200
3" - 6"	2,900
170 - 200 mm	3,500

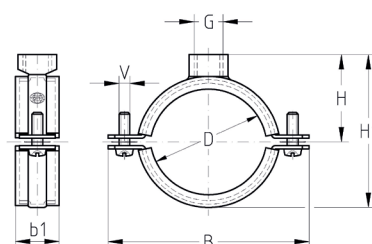

Connecting thread	Size		Clamping range	Dimensions [mm]					Part no.	Sales unit	Pack unit
G	[inch]	[mm]	[mm]	b1	B	H	H1	V			
½"	½"		21 - 26	23	71	47.5	70	M6 x 20	154945	100	Pieces
	¾"		26 - 30		75	49.5	74		154946		
	1"		31 - 38		81	52.5	80		M6 x 25		
	1¼"		40 - 47		91	57.5	90	154948			
	1½"		48 - 54		100	61.5	98	154949			
		57	54 - 60		105	64	103	154950			
	2"				60 - 66	111	67	109	154951		
	70"				68 - 73	28	126	71.5	118	M8 x 35	
	2½"		73 - 80		131		74	123	154817		
		83	82 - 87		142		79	133	154818		
	3"				87 - 94		146	81	137	M8 x 40	
			102	99 - 104	157		86.5	148	154820		
		105 - 112		166	91		157	154821			
	4"			112 - 118	172		94	163	154822		
			125	122 - 128	182		99	173	154823		
				132 - 137	191		103.5	182	154824		
	5"			137 - 142	196		106	187	154825		
			144	142 - 148	202		109	193	154826		
				149 - 156	210	113	201	154827			
		159 - 164		218	117	209	154828				
	6"		164 - 169	223	119.5	214	154829				
			200	197 - 203	256	136	247	154832	25		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

Single bossed clamps

with connection socket and DÄMMGULAST® yellow, galvanised

Connecting thread G	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b1	B	H	H1	V			
¾"	2"		60 - 66	23	111	71	113	M6 x 25	154954	50	Pieces
		70	68 - 73	28	126	75.5	122	M8 x 35	154833		
	2½"		73 - 80		131	78	127	M8 x 40	154834		
		83	82 - 87		142	83	137		154835		
	3"		87 - 94		146	85	141		154836		
		102	99 - 104		157	90.5	152		154837		
		110	105 - 112		166	95	161		154838		
	4"		112 - 118		172	98	167		154839		
		125	122 - 128		182	103	177		154840		
		133	132 - 137		191	107.5	186		154841		
	5"		137 - 142		196	110	191		154842		
		144	142 - 148		202	113	197		154843		
		150	149 - 156		210	117	205		154844		
		160	159 - 164		218	121	213		154845		
	6"		164 - 169		223	123.5	218		154846		
		170	169 - 172		225	124.5	220		154847		
		180	177 - 183		235	130	231		154848	25	
		200	197 - 203		256	140	251		154849		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.