MÜPRO

Single bossed clamps

with connecting socket, without lining, galvanised

Application

- Applicable as a pipeline anchor point
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B

Mounting as anchor assembly with pipe nipple and single bossed clamp with connecting socket

Features

Size	Max. recommended load [N]
1" - 2"	1,900
2½" - 6"	4,400

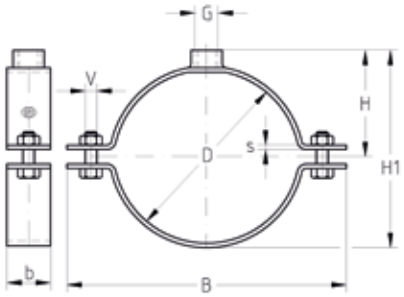

Connecting thread G	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b	B	H	H1	V	Part no.	Sales unit	Pack unit
½"	1"		31 - 37	20	71	47.5	70	M6 x 20	**154978**	100	Pieces
	1¼"	42.4	42 - 46		81	52.5	80	M6 x 25	**154980**		
	1½"		47 - 52		87	55	85		**154981**	50	
	2"		58 - 63		100	61.5	98		**154983**		
	2½"		72 - 78	25	120	68.5	112	M8 x 35	**154931**		
	3"		85 - 90		131	74	123		**154933**		
		102	99 - 104		146	81	137	M8 x 40	**154934**		
	4"		108 - 115		157	86.5	148		**154935**		
		125	125 - 130		172	94	163		**154936**		
	5"		133 - 140		182	99	173		**154937**		
		160	154 - 160		202	109	193		**154938**		
	6"		160 - 169		210	113	201		**154939**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

© MÜPRO