

# Single bossed clamps

with connecting socket, without lining, galvanised

## Application

- Applicable as a pipeline anchor point
- Suitable for pipe attachments in industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

## Your advantages

- Proven, two-piece single bossed clamp in heavy-duty design
- For bending-resistant fastening at greater distances from the building structure
- Ideal combination when used with pipe nipple and base plate or socket adapter
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B




Mounting as anchor assembly with pipe nipple and single bossed clamp with connecting socket



## Features



Size	Max. recommended load [N]
1" - 70 mm	1,900
2½" - 6"	4,400

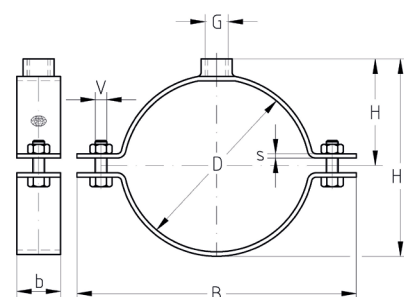

Connecting thread G	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]		b	B	H	H1	V			
½"	1"		31 - 37	20	71	47.5	70	M6 x 20	154978	100	Pieces
		40	38 - 41		75	49.5	74		154979		
	1¼"	42.4	42 - 46		81	52.5	80	M6 x 25	154980	50	
	1½"		47 - 52		87	55	85		154981		
		57	53 - 57		91	57.5	90	154982			
	2"		58 - 63		100	61.5	98	154983			
		70	64 - 71		105	64	103	154984			
	2½"		72 - 78	25	120	68.5	112	M8 x 35	154931		
		83	79 - 85		126	71.5	118		154932		
	3"		85 - 90		131	74	123	154933			
		102	99 - 104		146	81	137	M8 x 40	154934		
	4"		108 - 115		157	86.5	148		154935		
		122	118 - 123		166	91	157		159190		
		125	125 - 130		172	94	163		154936		
	5"		133 - 140		182	99	173		154937		
		147	142 - 148		191	103.5	182		159191		
		152	148 - 153		196	106	187		159192		
		160	154 - 160		202	109	193		154938		
	6"		160 - 169		210	113	201		154939		



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.