

Single bossed clamps
with DÄMMGULAST® yellow, stainless steel

Application

- Application in areas with high demands on sound insulation
- Suitable for attachments in industrial areas, as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter


- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- Vibration control lining DÄMMGULAST® with yellow identification stripe: average vibration improvement of up to 22 dB(A)



Features



Size	Max. recommended load [N]
3/8" - 2"	1,700
70 - 83 mm	2,200
3" - 133 mm	2,900
5" - 6"	3,500

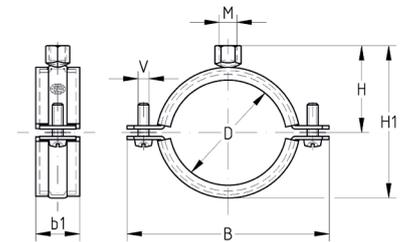

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Material V2A Part no.	Material V4A Part no.	Sales unit	Pack unit		
	[inch]	[mm]		b1	B	H	H1	V						
M8/M10	3/8"		14 - 20	23	64	35.5	55	M6 x 20	157024	157134	1	Pieces		
	1/2"		21 - 26		71	38.5	61		157025	157135				
	3/4"		26 - 30		75	40.5	65		157026	157136				
	1"		31 - 38		81	43.5	71		M6 x 25	157027			157137	25
	1 1/4"		40 - 47		91	48.5	81			157028			157138	1
	1 1/2"		48 - 54		100	52.5	89			157029			157139	
		57	54 - 60	28	105	55	94	M8 x 35	157120	157140				
	2"		60 - 66		111	58	100		157121	157141				
		70	68 - 73		126	62.5	109		157122	157142				
	2 1/2"		73 - 80		131	65	114		157123	157143				
		83	82 - 87		142	70	124		157124	157144				
	3"		87 - 94		146	72	128		M8 x 40	157125			157145	
		102	99 - 104	157	77.5	139	157126	157146						
		110	105 - 112	166	82	148	157127	157147						
	4"		112 - 118	172	85	154	157128	157148						
		125	122 - 128	182	90	164	157129	157149						
		133	132 - 137	191	94.5	173	157130							
			137 - 142	196	97	178	157131	157151						
	144	142 - 148	202	100	184	160490								
	150	149 - 156	210	104	192	160492	160494							
	160	159 - 164	218	108	200	157132	157152	25						
6"		164 - 169	223	110.5	205	157133	157153	1						

⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.