

Single bossed clamps

without lining, stainless steel

Application

- Applicable as a pipeline anchor point from 1/2" to 1 1/2"
- Suitable for installations without vibration control requirements
- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages


- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape



Features



| Size | Max. recommended load [N] |
|--------------|---------------------------|
| 3/8" - 70 mm | 2,200 |
| 2 1/2" - 6" | 4,400 |

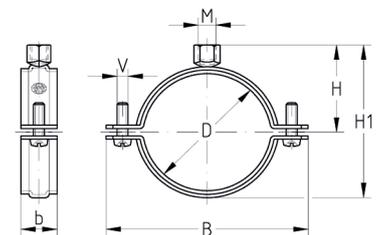

| Connecting thread M | Size | | Clamping range [mm] | Dimensions [mm] | | | | | Material V2A Part no. | Material V4A Part no. | Sales unit | Pack unit |
|---------------------|--------|-----------|---------------------|-----------------|------|---------|---------|---------|-----------------------|-----------------------|------------|-----------|
| | [inch] | [mm] | | b | B | H | H1 | V | | | | |
| M8/M10 | 3/8" | | 14 - 18 | 20 | 50 | 27.5 | 39 | M6 x 20 | 157154 | 157172 | 1 | Pieces |
| | 1/2" | | 19 - 25 | | 57 | 30.5 | 45 | | 157155 | 157173 | | |
| | 3/4" | | 26 - 30 | | 64 | 35.5 | 55 | | 157156 | 157174 | | |
| | 1" | | 31 - 37 | | 71 | 38.5 | 61 | | 157157 | 157175 | | |
| | | 40 | 38 - 42 | | 75 | 40.5 | 65 | | 160495 | 160500 | | |
| | 1 1/4" | 42.4 | 43 - 47 | | 81 | 43.5 | 71 | | M6 x 25 | 157158 | | |
| | 1 1/2" | | 47 - 52 | 87 | 46 | 76 | 157159 | 157177 | | | | |
| | | 57 | 53 - 57 | 91 | 48.5 | 81 | 157160 | 157178 | | | | |
| | 2" | | 58 - 63 | 100 | 52.5 | 89 | M8 x 35 | 157161 | 157179 | | | |
| | | 70 | 64 - 71 | 105 | 55 | 94 | | 157162 | 157180 | | | |
| | 2 1/2" | | 72 - 78 | 25 | 120 | 59.5 | | 103 | 157163 | 157181 | | |
| | | 83 | 79 - 85 | | 126 | 62.5 | | 109 | 157164 | 157182 | | |
| | 3" | | 85 - 90 | | 131 | 65 | | 114 | 157165 | 157183 | | |
| | | 98 | 94 - 99 | | 142 | 70 | | 124 | 160496 | 160501 | | |
| | | 102 | 99 - 104 | | 146 | 72 | 128 | M8 x 40 | 157166 | 157184 | | |
| | 4" | | 108 - 115 | | 157 | 77.5 | 139 | | 157167 | 157185 | | |
| | | 122 | 118 - 123 | 166 | 82 | 148 | 160497 | | 160502 | | | |
| | | 125 | 125 - 130 | 172 | 85 | 154 | 157168 | 157186 | | | | |
| 5" | | 133 - 140 | 182 | 90 | 164 | M8 x 40 | 157169 | 157187 | | | | |
| | 147 | 142 - 148 | 191 | 94.5 | 173 | | 160498 | | | | | |
| | 152 | 148 - 153 | 196 | 97 | 178 | | 160499 | 160504 | | | | |
| | 160 | 154 - 160 | 202 | 100 | 184 | | 157170 | | | | | |
| 6" | | 160 - 169 | 210 | 104 | 192 | | 157171 | 157189 | | | | |

⚠ Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.