

Duct clamps without lining, galvanised


Application

- For attachment of spiral-seam pipes

Your advantages

- Manufactured to suit air duct dimensions
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter


- Locking screws with combi-cross slit head and captive washer convenient for screwdrivers and nominal pipe size of up to 400 mm, M10 Hexagon screws for pipe sizes from 450 mm and upwards
- Manufactured to suite connecting thread M8/M10

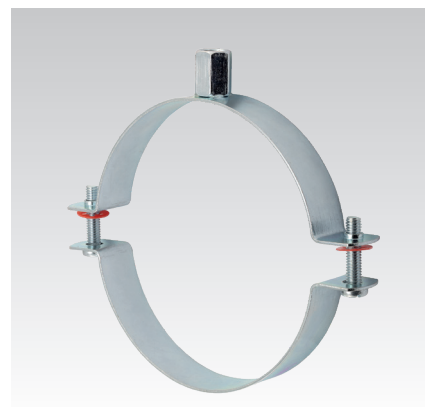

Features

Max. recommended load [N]

500

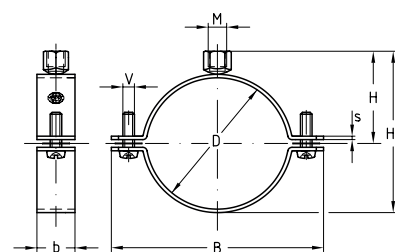

Nominal size DN [mm]	Connecting thread	Dimensions [mm]						Part no.	Sales unit	Pack unit
		B	H	H1	b	s	V			
80	M8/M10	119	50	91	20	1.2	M6	175917	50	Pieces
90		129	55	101				175918		
100		139	60	111				175919		
112		151	66	123				175920		
125		164	72	136				175921		
140		179	80	151				175922		
150		189	85	161				175923		
160		199	90	171				175924		
180		219	100	191				175925		
200		239	110	211				175926		
224		272	131	247	25	2	M10	115657		
250		298	144	273				115663		
280		328	159	303				115669		
300		349	170	324				115672		
315		364	177	339				115678		
355		404	197	379				115681		
400		449	220	424				115687		
450		515	245	474				115690		
500		565	270	524				115693		
560		625	300	584				115696		
600		665	320	624				115699		
630		696	335	655				115704		
710		776	375	735				3	115710	
800	866	420	825	115716						



Duct clamps can be produced in all other pipe sizes and types according to customer specifications.



For stainless steel version (without lining or with DÄMMGULAST® Junior lining) please refer to chapter „Stainless steel“.