

STATO® Clamps


two-piece, with DÄMMGULAST® yellow, galvanised

Application

- Attachment of pipelines with higher load requirements

Your advantages

- High-duty, two-part clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- The matching clamp for STATO® Bracket
- Supplied with connecting screws, nuts and captive washers

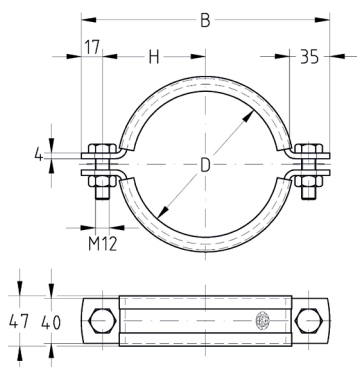

Features

Max. recommended tensile load Fz [N]

4,660

Pipe outer Ø D		Locking bolts	Dimensions [mm]		Part no.	Sales unit	Pack unit
[inch]	[mm]		B	H			
2"	60.3	M12	148	57	129214	12	Pieces
	70		158	62	129263		
2½"	76.1		164	65	129215		
	82.5		171	68	129267		
3"	88.9		177	71	129235		
	101.6		190	78	129187		
	108 - 110		198	82	129191	6	
4"	114.3		202	84	129243		
	125 - 127		213	90	129195		
	133		221	94	129199		
5"	139.7		228	97	129255		
	152.4		240	103	129202		
	159		247	107	129205		
6"	165		253	110	129260		
	168.3		256	111	129211		
	177.8		266	116	129212		
	212		300	133	129221		
8"	219.1		307	137	129224		
	244.5		333	149	129227		
	267		355	161	129231		
	273		361	164	129233		

! If required, STATO® clamps can be produced specifically in accordance with the external diameter of the pipelines or foam glass acoustic cladding, enabling axial movement of the pipeline in the clamp (guide or sliding clamp) or acoustic cladding to be stored with just a low contact pressure.

In combination with STATO® Brackets, a maximum of 2 STATO® Clamps with DÄMMGULAST® linings may be mounted per set of brackets. For a pipe outer diameter of 315 mm upwards, the STATO® Bracket heavy-duty version must be used.