

STATO® beugels


two-piece, with DÄMMGULAST® gel, galvanized

Toepassing

- Fastening of cables with increased load

Uw voordelen

- Heavy loadable two-piece clamp
- Due to two clamping bolts better adaptation to larger tolerances of the cable diameters
- The suitable clamp for the STATO® console
- Delivery with connecting bolts, nuts and washers

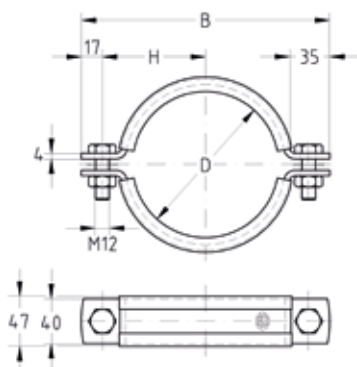

De gegevens

Max. aanbevolen trekbelasting Fz [N]

4.660

Leidingbuiten-Ø D		Sluitbouten	Afmetingen [mm]		Artikelnr.	Verp. eenheid	Eenheid
[Inch]	[mm]		B	H			
2½"	76,1	M12	164	65	129215	12	Stuk
3"	88,9		177	71	129235	6	
	108 - 110		198	82	129191		
4"	114,3		202	84	129243		
	152,4		240	103	129202		
6"	168,3		256	111	129211		
8"	219,1		307	137	129224		
	244,5		333	149	129227		
	273		361	164	129233		

! STATO® clamps can, if needed, be adapted for all other cable diameters, so that e.g. an axial movement of the cable in the clamp is possible (sliding clamp).

In combination with STATO® consoles, a maximum of 2 STATO® clamps with DÄMMGULAST® inlay strip per console set can be mounted. From a cable outer diameter of 315 mm, the STATO® console „heavy duty“ must be used.