

DÄMMGULAST® yellow



Application

- Ideal pipe clamp lining for vibration reduction

Your advantages

- Average vibration reduction up to 22 dB(A) due to 6 mm cylindrical profile
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe

- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining
- Clip-over edges prevent the lining from slipping out of the clamp
- Marked with the yellow MÜPRO identification stripe
- Silicone-free

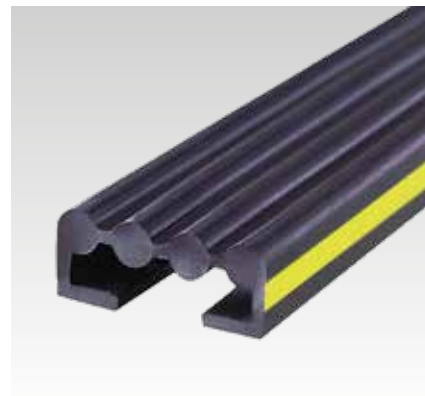

Features



Size	Design	Length [m]	Dimensions [mm]			Part no.	Sales unit	Pack unit
20 x 6 mm	3-string	30	6	B	C	107634	1	Roll
25 x 6 mm	4-string			3	20	107656		
30 x 6 mm				4	25	107659		
40 x 6 mm	6-string				30	107681		
50 x 6 mm	7-string			6	40	107682		
60 x 6 mm	8-string			10	50	107683		
80 x 8 mm	9-string	30	8		60	107684	1	Roll
					80			

DÄMMGULAST® Junior



Application

- Ideal pipe clamp lining for vibration reduction

Your advantages

- Average vibration reduction up to 18 dB(A) due to 4.5 mm cylindrical profile
- Prevents the occurrence of friction and stiction noises caused by thermal, axial expansion of the pipe
- Prevents the build-up of forces on the attachment due to the good rolling motion of the lining

- Clip-over edges prevent the lining from slipping out of the clamp
- Marked with the orange MÜPRO identification stripe
- Silicone-free

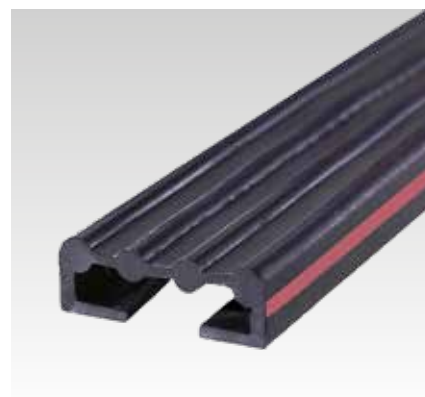

Features



Size	Design	Length [m]	Dimensions [mm]			Part no.	Sales unit	Pack unit
20 x 4.5 mm	3-string	30	4.5	B	C	107957	1	Roll
25 x 4.5 mm	4-string			3	20	107959		

! In order to accommodate large changes of pipe lengths, pipe guides allowing axial motion should be provided at the fixing points (see chapter „Anchor/expansion points,“). Vibration control linings are generally not suitable for vibration control at the pipe anchor point. For taking up the anchor point forces and providing good vibration control, PHONOLYT® Anchor point for pipes should be used.