

U-bolts

similar to DIN 3570, form A, galvanised

Application

- For simple pipe attachment in building technology and industrial construction
- Complies with the VdS CEA guideline 4001 for sprinkler systems

Your advantages


- Design similar to DIN 3570
- Standard material S235JR (St37) acc. to DIN EN 10025
- Electrolytically galvanised
- Supplied with 4 nuts acc. to DIN 934. In the M8 to M12 versions, also with 4 washers



Versions M16 to M20 with nuts



Versions M8 to M12 with nuts and washers

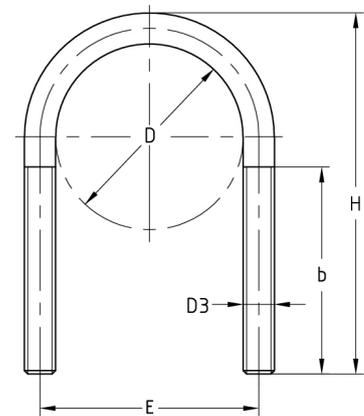

Pipe outer Ø D [mm]	Nominal size DN	Dimensions [mm]				Part no.	Sales unit	Pack unit	
		b	D3	E	H				
22	15	25	M8	30	52	113317	100	Pieces	
27	20	40		35	67				113320
34	25			42	74				113323
43	32			51	83				113326
49	40			57	89				113329
61	50	45	M10	71	104	124881	50		
77	65			87	120				124884
89	80			100	132				124887
108	100	55	M12	121	162	124920	25		
115				127	168				124929
133	125			146	183				124932
140				152	191				124935
159	150			172	208				124938
169			182	218	124941				
220	200	70	M16	233	278	125109	10		
273	250		M20	295	334	113174			
324	300			352	385	113180			5

! U-bolts with M8 to M12 threads are supplied with 4 washers and 4 nuts acc. to DIN 934 in electrolytically galvanised finish. For M16 threads and bigger, they are supplied with 4 nuts but without washers. Other sizes can be supplied upon request.