

MPC-Wall hanger supports

with vibration control, galvanised

Application

- For the vibration dampened attachment of equipment such as ventilation and air conditioning devices, pumps, household water tanks, etc. on walls
- Galvanised version for use in dry interiors

Your advantages


- Efficient mounting due to preassembled parts
- Various bracket lengths available (depending on device type)
- Simple height adjustment of the brackets due to sliding MPC-Hammer head bolts
- Variable adjustment of the mounting spaces on the bracket due to MPC-Rail nuts
- Average vibration reduction of 17 dB(A) due to DÄMMGULAST® Resilient pads
- MPC-support channels cut-to length and with holes on the rear side including MPC-protection caps



Features



Length L [mm]	Max. recommended load per set [N]
480	1,500
560	
640	
800	1,200
1,040	900

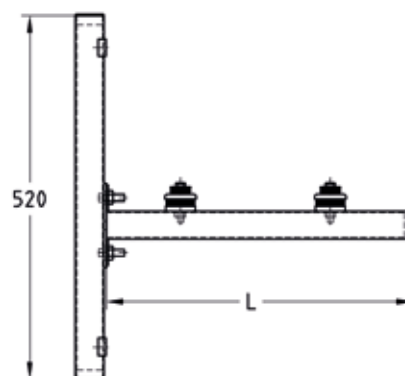

Complete kit consists of:

- 2 MPC-Support channels 38/40, length 520 mm,
- 2 MPC-Wall hanger brackets 38/40,
- 4 DÄMMGULAST® Resilient pads 43 x 11 mm,
- 6 MPC-Protection caps for profile 38/40,
- 4 MPC-Hammer head bolts M10/30,
- 4 DÄMMGULAST® Washers 8.5 x 28 mm,
- 4 Washers 8.5 x 28 x 1 mm,
- 4 MPC-Rail nuts M8 for profile 38/40,
- 4 Hexagon head bolts M8/55,
- 4 MPC-Clamp brackets M10 for profile 38/40

Profile	Length L [mm]	Part no.	Sales unit	Pack unit
38/40/2.0	480	113493	1	Pieces
	560	113511		
	640	113517		
	800	113523		
	1,040	113487		