

MPC-VARIO joint



zinc-nickel

Application

- Flexible implementation for connecting MPC-Support channels, for which different angle adjustments are required for versatile implementation possibilities, such as frame subconstructions for solar modules, angular support brackets, etc.

Your advantages

- Pivot angle from 10° to 180° for fast and flexible adaptation to a wide variety of attachment situations
- Cost savings can be realized in the area of stockkeeping, as a variety of support solutions can be realized with only one item
- Stable design of the joint for optimal transmission of force
- Quick and easy mounting at the construction site via double rail nuts
- Zinc-nickel coating ensures trouble-free outdoor use

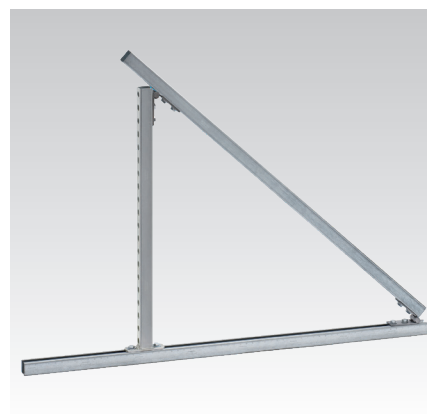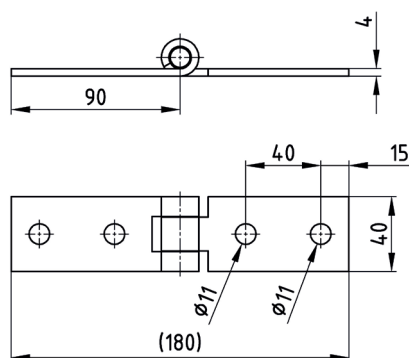

Features

Design				Max. recommended load [N]
				1,000
				2,000

For profiles	Length [mm]	Width [mm]	Thickness [mm]	Hole diameter [mm]	Part no.	Sales unit	Pack unit
38/24-40/120	90	40	4	11	139746	1	Pieces