

MPC-Girder cleats




stainless steel

Application

- Attachment of MPC-Support channels to steel girders without drilling or welding

Your advantages

- Attachment to the girder without welding or drilling
- Allows subsequent adjustment of the channels along and across the supporting beam
- Suitable for flange thicknesses of common support profiles
- Easy to install, pre-assembled kit
- Proper attachment of suspended loads on girders

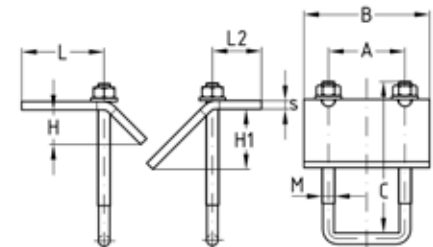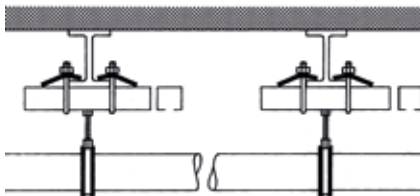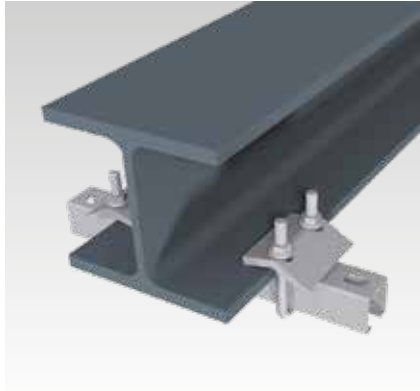

Features



For profiles	Max. admissible load/pair [N]
27/18, 28/30	2,800
38/40, 40/60	10,800

For profiles	Thread	Spanner width [mm]	Max. clamping thickness [mm]	Dimensions [mm]							Material V2A	Material V4A	Sales unit	Pack unit
				A	B	C	H	H1	L	L2	Part no.	Part no.		
27/18, 28/30	M6	10	22	37	60	80	18	29	43.8	27.8	130282	130280	1	Pieces
38/40, 40/60	M10	15		50	80	100	18.5	24.5	39.7	30.7	130270	130271		