

MPR-Hammer head fasteners


zinc lamella coating

Application

- For time-saving, efficient attachment of pipe clamps to MPR-Support channels
- For indoor and outdoor use


Your advantages

- Easy and fast assembly in the rail slot
- Lateral adjustment at any time, allows perfect alignment of the pipeline after installation
- Various lengths and thread diameters can be combined within the same channel
- Interlocking threaded plate for secure positive connection in the rail slot of the MPR-Support channels



Features

Material thickness of support channel [mm]	Connecting thread	Max. recommended tensile load F _z [N]	Tightening torque [Nm]
2.0	M8	4,500	9
	M10		17
	M12		29
	M16		
2.5	M8	5,000	9
	M10		17
	M12		29
	M16		

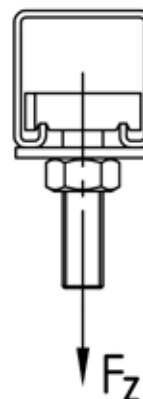

For profiles	Connecting thread	Length [mm]	Usable thread length L [mm]	Part no.	Sales unit	Pack unit
41/21/2.0, 41/41/2.0, 41/41/2.5, 41/62/2.5, 41/42/2.0, 41/82/2.0, 41/124/2.5	M8	35	10	154193	25	Pieces
		40	15	154194		
		50	25	154195		
		80	55	154196		
		100	75	154197		
	M10	35	8	154198		
		40	13	154199		
		55	28	154200		
		60	33	154201		
		80	53	154202		
41/21/2.0, 41/41/2.0, 41/41/2.5, 41/62/2.5, 41/82/2.0, 41/124/2.5	M12	100	73	154203	10	Pieces
		40	9	154204		
		55	24	154205		
		60	29	154206		
		80	49	154207		
41/41/2.0, 41/41/2.5, 41/62/2.5, 41/82/2.0, 41/124/2.5	M16	100	69	154208		
		65	30	154209		
		100	65	154210		

