

MPR-Girder cleats




hot-dip galvanised

Application

- Attachment of MPR-Support channels to steel girders without drilling or welding
- For indoor and outdoor use


Your advantages

- Ideal solution for attachment of MPR-Support channels to steel girders
- Allows subsequent adjustment of the channels along and across the supporting beam
- Suitable for flange thicknesses of common support profiles
- Easy to install, pre-assembled kit
- Proper attachment of suspended loads on girders

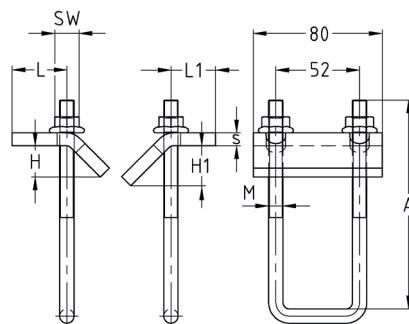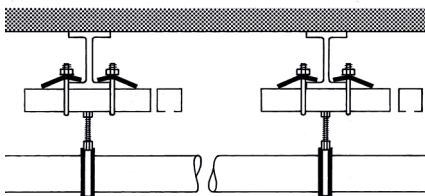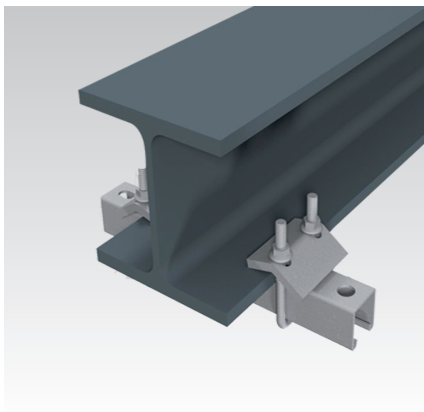

Features

For profiles	Thread U-brackets	Max. permitted loading/pair with hammer head fasteners [N]			
		M8	M10	M12	M16
41/21/2.0, 41/41/2.0, 41/42/2.0	M8	4,500	4,500	4,500	4,500
41/41/2.5					
41/21/2.0, 41/41/2.0, 41/42/2.0	M10		5,000	5,000	5,000
41/41/2.5			4,500	4,500	4,500
41/62/2.5			5,000	5,000	5,000
41/82/2.5			4,500	4,500	4,500
41/124/2.5			5,000	5,000	5,000

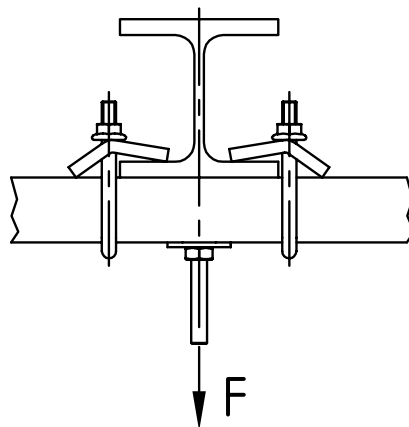

For profiles	Max. clamping thickness [mm]	Thread	Spanner width [mm]	Dimensions [mm]						Part no.	Sales unit	Pack unit
				A	H	H1	L	L1	s			
41/21, 41/41, 41/42	22	M8	13	90	18.5	24.5	34	30	6	154232	10	Pieces
		M10	15						8	154230		
41/62, 41/82				130						154231		
41/124				170						154233		