

Channel connector


heavy-duty version, double length, hot-dip galvanised

Application

■ Channel connector in heavy, stable design for secure connection of MPC- and MPR-Support channels

Your advantages

- Form-locking connection due to max. eightfold screw connection
- Especially long guidance of the connected MPC- and MPR-Support channels ensures a high level of protection against lateral deflection
- Oblong holes in the channel connector compensate tolerances when installing

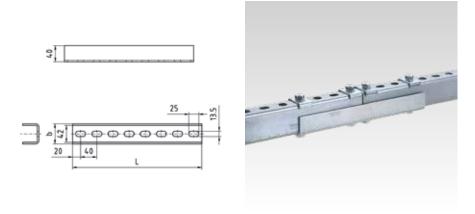

| For profiles | Dimensions [mm] | | Part no. | Sales unit | Pack unit |
|----------------------------|-----------------|-----|----------|------------|-----------|
| | b | L | | | |
| 38/40-40/120, 41/21-41/124 | 50 | 320 | 142839 | 1 | Pieces |

