MPT-Saddle supports for installation of support profiles

hot-dip galvanised

Application

- Stable saddle supports for the connection of MPT-Support profiles in case of 90°-corner connections

Your advantages

- For fast and efficient mounting of cross-beams of MPT-Support profiles
- Standardised hot-dip galvanising for flexible implementation outdoors and indoors

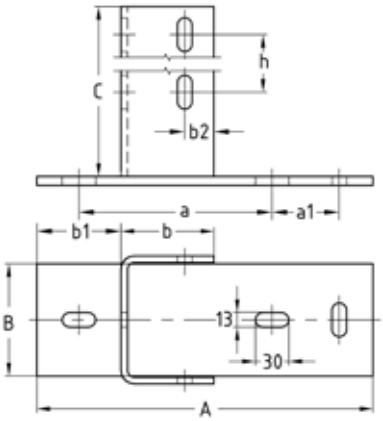

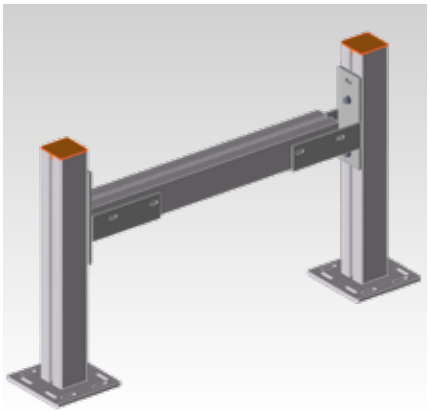

For profiles	Dimensions [mm]									Weight [kg]	**Part no.**	Sales unit	Pack unit
	a	a1	b	b1	b2	h	A	B	C				
Q50-2.5	172.5	60	57	75	20	150	300	100	250	4.262	**151335**	1	Pieces
Q80-2.0	152.5		73		26		280	80		3.916	**167935**		
Q100-2.5, Q100-3.5, Q150-2.5	172.5		83				300	100		4.964	**151336**		

⚠ Please note that a suspended mounting situation reduces the maximum recommended load.

© MÜPRO