

Punched tapes



galvanised or plastic coated

Application

- Efficient punched tape for simple fastening jobs

Your advantages

- Easy to handle due to versatile mounting accessories
- Can be fitted with DÄMMGULAST® Junior vibration control lining

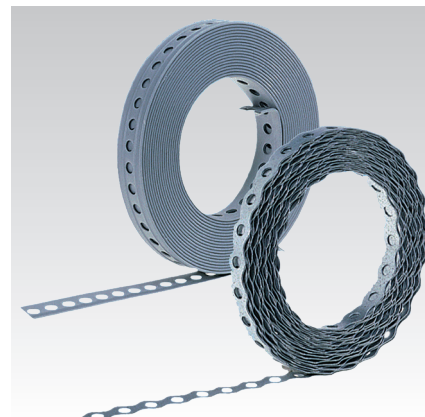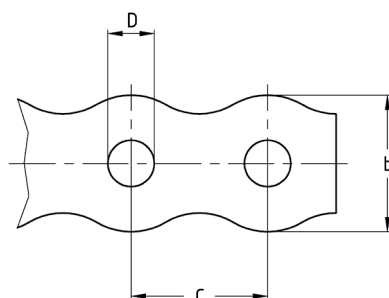

Features

Design	Width b [mm]	Max. recommended load [N]
straight edges, galvanised	17	740
corrugated edges, galvanised	12	480
	17	800
plastic coated	19	1,100
	27	1,300

Design	Width b [mm]	For thread	Hole diameter D [mm]	Hole-centre distance C [mm]	Length [m]	Part no.	Sales unit	Pack unit
straight edges, galvanised	17	M6	6.5	12	10	114798	20	Roll
					50	114804	1	
corrugated edges, galvanised	12	M5	5.5	14.5	10	114807		
	17	M6	6.5	20		114801		
plastic coated	19			15		114786		
	27	M8	8.5			114789		

⚠ Rolls of 50 m are supplied in a practical dispenser case.

Bolts with nuts

for punched tapes, galvanised

Connecting thread	Screw length [mm]	Part no.	Sales unit	Pack unit
M8	25	121167	100	Pieces



Washers

for punched tapes, galvanised

For thread	Outer diameter [mm]	Inner diameter [mm]	Thickness [mm]	Part no.	Sales unit	Pack unit
M6	12	6.4	1.6	127307	100	Pieces
M8	16	8.4		127310		

