


## Distance angles

galvanised

Length L [mm]	Part no.	Sales unit	Pack unit
30	106019	100	Pieces
35	106021		
40	106024		
50	106032		
60	106034		
80	106038		
100	106017		



## Joint brackets

galvanised





### Application




- Joint bracket for suspensions and anchorings, e.g. for fixed points or fastenings of bridge drainage systems

### Your advantages

- Large swivel range for a wide variety of installation situations
- Additional materials / surfaces available upon request

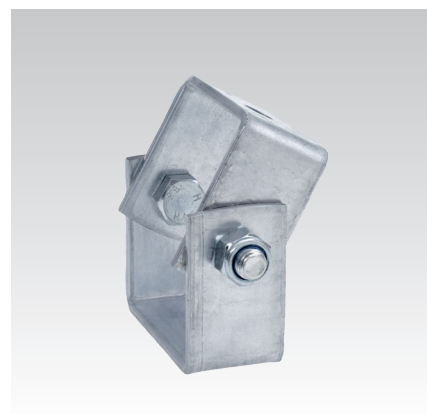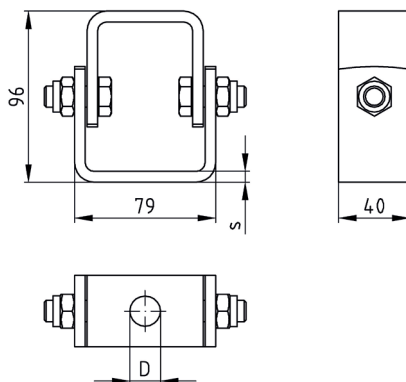

### Features

Size	Tensile load at swivel angle 0° [N]	Tensile load at swivel angle 45° [N]	Maximum recommended swivel angle
			
40 x 4 LG 13	5,000	3,500	90°
40 x 6 LG 13	8,000	5,000	
40 x 6 LG 17			

Size	For thread	Thickness s [mm]	Diameter D [mm]	Part no.	Sales unit	Pack unit
40 x 4 LG 13	M12	4	13	111872	1	Pieces
40 x 6 LG 13		6		139130		
40 x 6 LG 17	M16		17	139147		



Order-related manufacturing, price, and delivery time available upon request.



For hot-dip galvanised joint brackets please refer to chapter „Hot-dip galvanised products“.  
For stainless steel joint brackets please refer to chapter „Stainless steel“.