MÜPRO

Trapezoid-sheet hangers

galvanised

Application

- For the professional attachment of installations to trapezoidal sheets

Your advantages

- Attachment using sealing rivets or self-drilling screws to the stays of the corrugations
- Easy to adapt to different trapezoidal sheet sections due to predetermined bending points
- Round holes at the ends of the legs also enable a pass-throught-mounting of M8 or M10 threaded rods
- Available with unthreaded through hole or with adjusting nut for height setting
- Approved by VdS for pipe attachments up to DN 50 with threaded rods and counted nuts (observe assembly instructions included with the product)

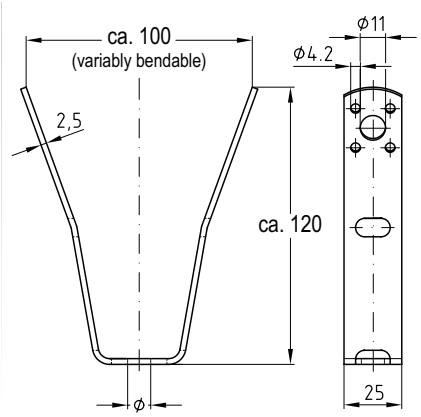

Trapezoid-sheet hanger
with unthreaded through-hole

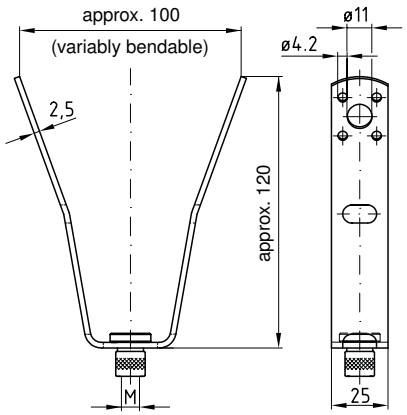

Trapezoid-sheet hanger
with adjusting nut

Features

VdS G 4880021

Max. recommended load [N]	1,300

Design	Type	VdS	Part no.	Sales unit	Pack unit
with unthreaded through-hole	Hole-Ø 8.5 mm	x	**130205**	25	Pieces
	Hole-Ø 10.5 mm	x	**130204**		
with adjusting nut	M8	x	**130202**		
	M10	x	**130201**		

The specifications of the International Assotiation for Light metal Construction IFBS must be observed for the attachment of trapezoidal sheet hangers on trapezoidal sheet metal by means of drilling screws made of cast hardened steel or blind rivets. Zinc plated drilling screws with ETA assessment can be found in the section „Ventilation“.

In case of attachment by means of threaded rods and through-hole mounting the max. hole bearing has to be calculated.

Refer to chapter „Tools“ for trapezoid-sheet pliers used for attachment.