

Joint brackets


hot-dip galvanised

Application

- Joint bracket for suspensions and anchorings, e.g. for fixed points or fastenings of bridge drainage systems

Your advantages

- Large swivel range for a wide variety of installation situations
- Standard compliant hot-dip galvanising for outdoor use
- Additional materials / surfaces available upon request

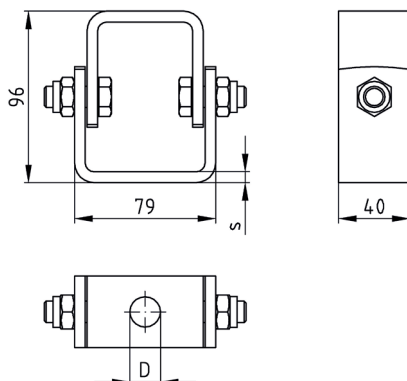

Features

Size	Tensile load at swivel angle 0° [N]	Tensile load at swivel angle 45° [N]	Maximum recommended swivel angle
40 x 6 LG 13	8,000	5,000	90°
40 x 6 LG 17			

Size	For thread	Thickness s [mm]	Diameter D [mm]	Part no.	Sales unit	Pack unit
40 x 6 LG 13	M12	6	13	139133	1	Pieces
40 x 6 LG 17	M16		17	139151	25	



Size 40 x 6 LG 17 is made to order, price, and delivery time upon request.

