

PHONOLYT® Button anchor points



galvanised

Application

- Pipe anchor point with outstanding sound isolation
- Efficient fixed point for plastic and cast pipes
- Suitable for wall, ceiling and floor mounting
- Alternative attachment by using nylon plug and bolt screw, through anchor, etc.

Your advantages

- Easy to fit as there is only one central connection thread
- Lower wall distance to building structure
- Easy to attach to the structure by means of steel anchor and threaded pin M10
- Silicone-free

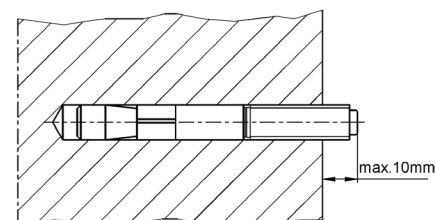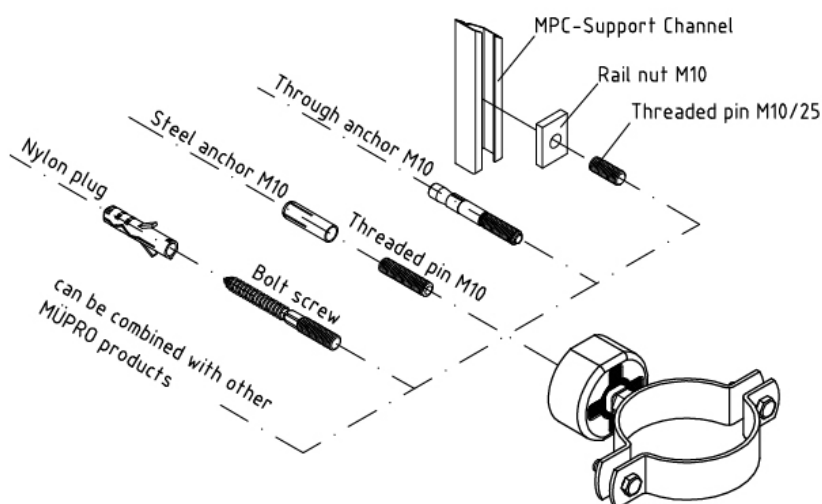


Attachment to building structure: The projecting end of plug or threaded pin from the wall or ceiling must not exceed 10 mm!

Features



Average vibration reduction [dB(A)]	30
Max. recommended tensile load F_z [N]	1,500
Max. recommended compression load F_D [N]	1,500
Max. recommended load axial F_{ax} [N]	1,080

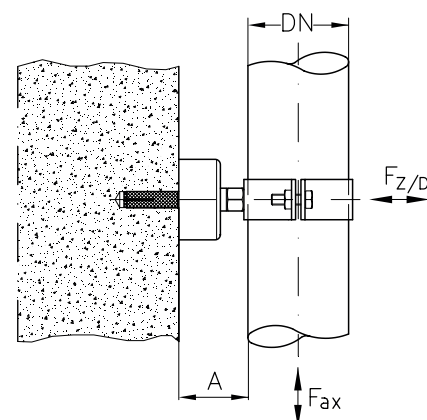

Nominal size DN	Clamping range [mm]	Wall distance A [mm]	Part no.	Sales unit	Pack unit
70	73 - 78	51	120438	5	Pieces
80	80 - 85		120279	1	
100	108 - 116		120434	5	