

Pendelophangers

galvanized

Application

- Slip point fastening for hanging conduits - makes axial and radial movement possible
- For the fastening of conduits with temperature-dependent expansion
- Especially suitable for pipes at greater distance from the ceiling
- At the installation of pendelophangers with MPR Quick fasteners, the installation instructions for the products must be followed

Advantages



- Freedom of movement 360°
- Large deflection from the vertical line
- By choosing the correct thread length, the hanging height can be adjusted to the situation
- By means of the thread depth, the height setting can be precisely regulated
- The thread depth can be checked via the safety control opening (long version)
- Short version for low construction height



Pendelophanger, kort



Pendelophanger, lang

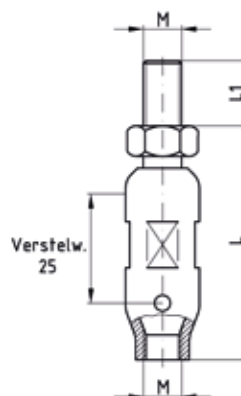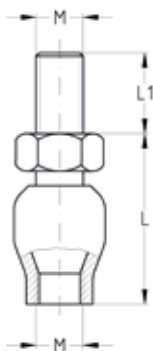

The data



Aansluitdraad	Max. aanbevolen belasting [N]
M8	2.400
M10	3.000
M12	3500



Uitvoering	Aansluitdraad	Lengte L [mm]	Draadlengte L1 [mm]	Doorbuiging van de verticale	Hoogteaanpassing tot [mm]	Artikelnr.	Verp. eenheid	Eenheid
kort	M8	34	18	tot 12°	-	120231	100	Stuk
	M10	70				120227	50	
lang, met veiligheidscontroleopening	M8	35	57		25	120223		
	M10	61				120208		
						120204		
	M12					120211		
lang, grotere afbuiging	M10	60	18	tot 22°		120196		



Voor een goede leidinggeleiding waarbij de mogelijkheid dat de leiding kantelt, uitgesloten is, moeten er per bevestigingspunt twee pendelophangers worden gemonteerd. De draadstang moet met een contramoer worden geborgd.