

Pipe slides type DHV-2


with two pipe clamps, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For fastening piping with slope or consistent centre line
- Version as pipe slide for large nominal sizes from DN 200

Your advantages

- Individual adjustment of the distance between the pipe clamp and sub-construction on the building site
- Compensation for height tolerances and unevenness in the subconstruction
- Slope adjustment axial direction up to 5°
- Hot-dip galvanised, suitable for outdoor use

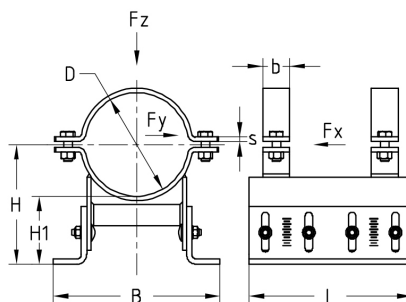

Type	Adjust- ment range [mm]	Nominal size DN [mm]	Pipe outer Ø D [mm]	b	s	Dimensions [mm]				Loading			Weight [kg]	Part no.	Sales unit	Pack unit
						B	H	H1	L	F _x [kN]	F _y [kN]	F _z [kN]				
DHV-2-100 W37-OF-SF 219.1	100 - 150	200	219.1	50	8	322	210 - 260	100 - 150	300	19.4	27.7	50	19.06	169703	1	Pieces
DHV-2-100 W37-OF-SF 267.0		250	267	60		341	234 - 284			17.8	25.4		22.08	170464		
DHV-2-100 W37-OF-SF 273.0			273			346	237 - 287			17.6	25.1		22.24	169704		
DHV-2-100 W37-OF-SF 323.9		300	323.9			366	262 - 312			16.1	23.1		23.55	169705		
DHV-2-100 W37-OF-SF 356.0		350	356			376	278 - 328			15.3	21.9		24.4	170468		
DHV-2-100 W37-OF-SF 368.0			368			382	284 - 334			15.1	21.5		24.71	169706		
DHV-2-100 W37-OF-SF 406.4		400	406.4	70	10	404	304 - 354			14.3	20.4		33.24	169707		
DHV-2-100 W37-OF-SF 508.0		500	508			437	354 - 404			12.5	17.8		36.94	169708		
DHV-2-100 W37-OF-SF 610.0		600	610			462	405 - 455			11.1	15.8		40.58	169709		
DHV-2-150 W37-OF-SF 219.1	150 - 200	200	219.1	50	8	322	260 - 310	150 - 200		16.3	23.2		20.95	169710		
DHV-2-150 W37-OF-SF 273.0		250	273	60		346	287 - 337			15	21.4		24.12	169711		
DHV-2-150 W37-OF-SF 323.9		300	323.9			366	312 - 362			13.9	19.9		25.34	169712		
DHV-2-150 W37-OF-SF 368.0		350	368			382	334 - 384			13.1	18.7		26.6	169713		
DHV-2-150 W37-OF-SF 406.4		400	406.4	70	10	404	354 - 404			12.5	17.8		35.6	169714		
DHV-2-150 W37-OF-SF 508.0		500	508			437	404 - 454			11.1	15.8		39.3	169715		
DHV-2-150 W37-OF-SF 610.0		600	610			462	455 - 505			10	14.2		42.94	169716		
DHV-2-200 W37-OF-SF 219.1	200 - 250	200	219.1	50	8	322	310 - 360	200 - 250		14	20		22.83	169717		
DHV-2-200 W37-OF-SF 273.0		250	273	60		346	337 - 387				18.6		26.01	169718		
DHV-2-200 W37-OF-SF 323.9		300	323.9			366	362 - 412				17.5		27.31	169719		
DHV-2-200 W37-OF-SF 368.0		350	368			382	384 - 434				16.6		28.48	169720		
DHV-2-200 W37-OF-SF 406.4		400	406.4	70	10	404	404 - 454				15.9		37.95	169721		
DHV-2-200 W37-OF-SF 508.0		500	508			437	454 - 504				14.3		41.65	169722		
DHV-2-200 W37-OF-SF 610.0		600	610			462	505 - 555				13		45.29	169723		



For fixing the height adjustment a tightening torque of 75 Nm for the carriage bolts need to be considered.