

### Pipe slides type TF-2


with two pipe clamps, DIN 3567

#### Application

- Attachment of pipelines preferably with insulation in heavy-duty building technology, industrial construction and plant engineering
- Preferred for insulated pipes
- For insulation thicknesses up to 140 mm

#### Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

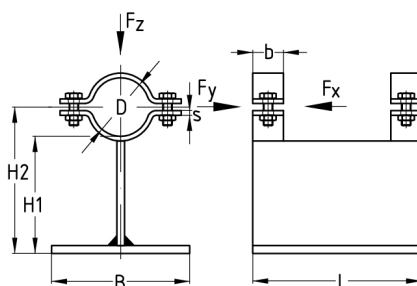

#### Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Design W37-OR-SG Part no.	Design W37-OF-SF Part no.	Sales unit	Pack unit
		b	s	B	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]					
25	33.7	30	5	180	150	167	220	1	1	2	6.1	116485	116446	1	Pieces
32	42.4					171		1.4	1.4	2.6	6.2	116488	116449		
40	48.3					174		2	2	4		116491	116452		
50	60.3	40	6			180		3.2	3.2	6.4	6.8	116494	116455		
65	76.1					188		3.6	3.6	7.6	7	116497	116458		
80	88.9					195		4	4	8	7.2	116500	116461		
100	114.3	50	8			207		5.2	5.2	10.4	9.2	116476	116437		
125	139.7					220		5.5	5.5	11	9.6	116479	116440		
150	168.3					234		5.7	5.7	11.4	10.1	116482	116443		

**Ordering example:** T-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 76.1 mm.

**Part no.: 116458, Type: TF-2-W37-OF-SF-76.1**



Pipe guides with polyamide sliding surface as well as other versions available upon request.