

Pipe slides type THV-1


with one pipe clamp, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For fastening piping with slope or consistent centre line

Your advantages

- Individual adjustment of the distance between the pipe clamp and sub-construction on the building site
- Compensation for height tolerances and unevenness in the subconstruction
- Slope adjustment axial direction up to 15°
- Hot-dip galvanised, suitable for outdoor use

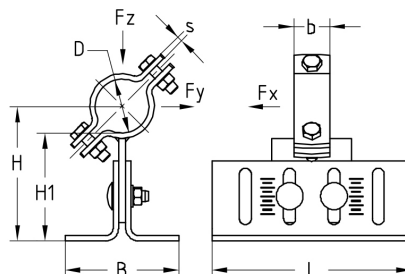

Type	Adjust- ment range [mm]	Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Part no.	Sales unit	Pack unit
				b	s	B	H	H1	L	Fx [kN]	Fy [kN]	Fz [kN]				
THV-1-100 W37-OF-SF 33.7	100 - 140	25	33.7	30	5	128	117 - 157	100 - 140	225	6.7	3.4	8	3.52	169637	1	Pieces
THV-1-100 W37-OF-SF 42.4		32	42.4				122 - 162			6.6	3.3		3.57	169638		
THV-1-100 W37-OF-SF 48.3		40	48.3				125 - 165			6.4	3.2		3.59	169639		
THV-1-100 W37-OF-SF 60.3		50	60.3	40	6		132 - 172	101 - 141		6.2	3.1		3.94	169640		
THV-1-100 W37-OF-SF 76.1		65	76.1				140 - 180			5.9	3		4.06	169641		
THV-1-100 W37-OF-SF 88.9		80	88.9				146 - 186			5.7	2.9		4.1	169642		
THV-1-100 W37-OF-SF 114.3		100	114.3	50	8		161 - 201	103 - 143		5.4	2.7		5.14	169643		
THV-1-100 W37-OF-SF 139.7		125	139.7				173 - 213			5	2.5		5.39	169644		
THV-1-100 W37-OF-SF 168.3		150	168.3				188 - 228			4.7	2.4		5.66	169645		
THV-1-100 W37-OF-SF 193.7		175	193.7				200 - 240			4.5	2.2		5.91	169646		
THV-1-100 W37-OF-SF 219.1		200	219.1				213 - 253			4.2	2.1		6.17	169647		
THV-1-140 W37-OF-SF 33.7	140 - 180	25	33.7	30	5		157 - 197	140 - 180		5.4	2.7		3.76	169648	1	Pieces
THV-1-140 W37-OF-SF 42.4		32	42.4				162 - 202			5.3	2.6		3.79	169649		
THV-1-140 W37-OF-SF 48.3		40	48.3				165 - 205			5.2			3.82	169650		
THV-1-140 W37-OF-SF 60.3		50	60.3	40	6		172 - 212	141 - 181		5	2.5		4.16	169651		
THV-1-140 W37-OF-SF 76.1		65	76.1				180 - 220			4.9	2.4		4.25	169652		
THV-1-140 W37-OF-SF 88.9		80	88.9				186 - 226			4.7			4.32	169653		
THV-1-140 W37-OF-SF 114.3		100	114.3	50	8		201 - 241	143 - 183		4.5	2.2		5.36	169654		
THV-1-140 W37-OF-SF 139.7		125	139.7				213 - 253			4.2	2.1		5.61	169655		
THV-1-140 W37-OF-SF 168.3		150	168.3				228 - 268			4	2		5.89	169656		
THV-1-140 W37-OF-SF 193.7		175	193.7				240 - 280			3.8	1.9		6.14	169657		
THV-1-140 W37-OF-SF 219.1		200	219.1				253 - 293			3.7	1.8		6.39	169658		
THV-1-180 W37-OF-SF 33.7	180 - 220	25	33.7	30	5		197 - 237	180 - 220		4.5	2.2		3.98	169659	1	Pieces
THV-1-180 W37-OF-SF 42.4		32	42.4				202 - 242			4.4			4.02	169660		
THV-1-180 W37-OF-SF 48.3		40	48.3				205 - 245			4.3			4.04	169661		
THV-1-180 W37-OF-SF 60.3		50	60.3	40	6		212 - 252	181 - 221		4.2	2.1		4.39	169662		
THV-1-180 W37-OF-SF 76.1		65	76.1				220 - 260			4.1	2		4.47	169663		
THV-1-180 W37-OF-SF 88.9		80	88.9				226 - 266			4			4.55	169664		
THV-1-180 W37-OF-SF 114.3		100	114.3	50	8		241 - 281	183 - 223		3.8	1.9		5.59	169665		
THV-1-180 W37-OF-SF 139.7		125	139.7				253 - 293			3.6	1.8		5.84	169666		
THV-1-180 W37-OF-SF 168.3		150	168.3				268 - 308			3.5	1.7		6.11	169667		
THV-1-180 W37-OF-SF 193.7		175	193.7				280 - 320			3.3			6.37	169668		
THV-1-180 W37-OF-SF 219.1		200	219.1				293 - 333			3.2	1.6		6.62	169669		



For fixing the height adjustment a tightening torque of 75 Nm for the carriage bolts need to be considered.