

Pipe slides type THV-2


with two pipe clamps, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For fastening piping with slope or consistent centre line

Your advantages

- Individual adjustment of the distance between the pipe clamp and sub-construction on the building site
- Compensation for height tolerances and unevenness in the subconstruction
- Slope adjustment axial direction up to 10°
- Hot-dip galvanised, suitable for outdoor use

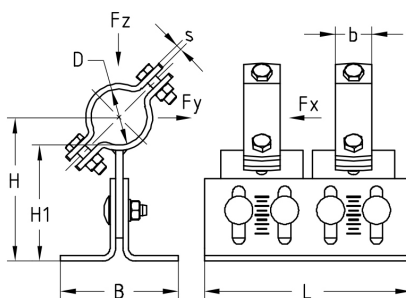

Type	Adjustment range [mm]	Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Part no.	Sales unit	Pack unit
				b	s	B	H	H1	L	Fx [kN]	Fy [kN]	Fz [kN]				
THV-2-100 W37-OF-SF 33.7	100 - 140	25	33.7	30	5	128	117 - 157	100 - 140	225	7.2	4.6	16	4.54	169670	1	Pieces
THV-2-100 W37-OF-SF 42.4		32	42.4				122 - 162			7	4.5		4.61	169671		
THV-2-100 W37-OF-SF 48.3		40	48.3				125 - 165			6.8	4.4		4.65	169672		
THV-2-100 W37-OF-SF 60.3		50	60.3	40	6		132 - 172	101 - 141		6.6	4.2		5.35	169673		
THV-2-100 W37-OF-SF 76.1		65	76.1				140 - 180			6.3	4		5.59	169674		
THV-2-100 W37-OF-SF 88.9		80	88.9				146 - 186			6.1	3.9		5.67	169675		
THV-2-100 W37-OF-SF 114.3		100	114.3	50	8		161 - 201	103 - 143		5.7	3.6		7.75	169676		
THV-2-100 W37-OF-SF 139.7		125	139.7				173 - 213			5.3	3.4		8.25	169677		
THV-2-100 W37-OF-SF 168.3		150	168.3				188 - 228			5	3.2		8.8	169678		
THV-2-100 W37-OF-SF 193.7		175	193.7				200 - 240			4.7	3		9.3	169679		
THV-2-100 W37-OF-SF 219.1		200	219.1				213 - 253			4.5	2.9		9.81	169680		
THV-2-140 W37-OF-SF 33.7	140 - 180	25	33.7	30	5		157 - 197	140 - 180		5.7	3.6		4.99	169681		
THV-2-140 W37-OF-SF 42.4		32	42.4				162 - 202			5.6			5.06	169682		
THV-2-140 W37-OF-SF 48.3		40	48.3				165 - 205			5.5	3.5		5.1	169683		
THV-2-140 W37-OF-SF 60.3		50	60.3	40	6		172 - 212	141 - 181		5.3	3.4		5.8	169684		
THV-2-140 W37-OF-SF 76.1		65	76.1				180 - 220			5.1	3.3		5.97	169685		
THV-2-140 W37-OF-SF 88.9		80	88.9				186 - 226			5	3.2		6.12	169686		
THV-2-140 W37-OF-SF 114.3		100	114.3	50	8		201 - 241	143 - 183		4.7	3		8.2	169687		
THV-2-140 W37-OF-SF 139.7		125	139.7				213 - 253			4.5	2.9		8.7	169688		
THV-2-140 W37-OF-SF 168.3		150	168.3				228 - 268			4.2	2.7		9.25	169689		
THV-2-140 W37-OF-SF 193.7		175	193.7				240 - 280			4.1	2.6		9.75	169690		
THV-2-140 W37-OF-SF 219.1		200	219.1				253 - 293			3.9	2.5		10.26	169691		
THV-2-180 W37-OF-SF 33.7	180 - 220	25	33.7	30	5		197 - 237	180 - 220		4.7	3		5.44	169692		
THV-2-180 W37-OF-SF 42.4		32	42.4				202 - 242						5.51	169693		
THV-2-180 W37-OF-SF 48.3		40	48.3				205 - 245			4.6	2.9		5.56	169694		
THV-2-180 W37-OF-SF 60.3		50	60.3	40	6		212 - 252	181 - 221		4.5			6.25	169695		
THV-2-180 W37-OF-SF 76.1		65	76.1				220 - 260			4.3	2.8		6.42	169696		
THV-2-180 W37-OF-SF 88.9		80	88.9				226 - 266			4.2	2.7		6.57	169697		
THV-2-180 W37-OF-SF 114.3		100	114.3	50	8		241 - 281	183 - 223		4	2.6		8.65	169698		
THV-2-180 W37-OF-SF 139.7		125	139.7				253 - 293			3.9	2.5		9.15	169699		
THV-2-180 W37-OF-SF 168.3		150	168.3				268 - 308			3.7	2.4		9.7	169700		
THV-2-180 W37-OF-SF 193.7		175	193.7				280 - 320			3.5	2.3		10.21	169701		
THV-2-180 W37-OF-SF 219.1		200	219.1				293 - 333			3.4	2.2		10.71	169702		



For fixing the height adjustment a tightening torque of 75 Nm for the carriage bolts need to be considered.