

Pipe slides type TP-1



with one pipe clamp, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 75 mm for type TP80-1
- For insulation thicknesses up to 90 mm for type TP100-1

Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

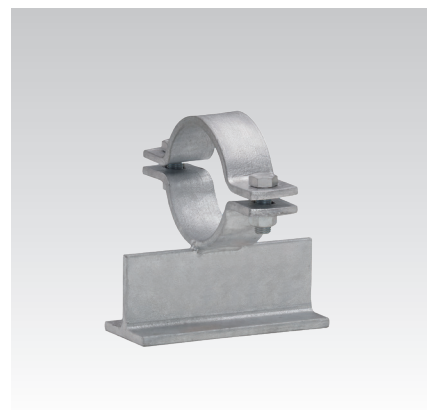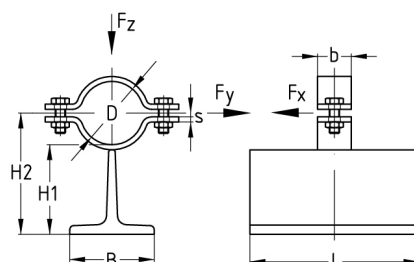

Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF



Type	Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Design W37-OR-SG Part no.	Design W37-OF-SF Part no.	Sales unit	Pack unit
			b	s	B	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]					
T-profile 80	25	33.7	30	5	80	85	102	200	0.6	0.6	1.2	2.47	116871	116826	1	Pieces
	32	42.4					106		0.7	0.7		2.5	116874	116829		
	40	48.3					109				1.4	2.52	116877	116832		
	50	60.3	40	6		86	116		1.2	1.2	2.4	2.84	116880	116835		
	65	76.1					124		1.3	1.3	2.6	2.93	116883	116838		
	80	88.9					130		1.4	1.4	2.8	3.02	116886	116841		
	100	114.3	50	8		88	145		2.8	2.8	5.6	4.04	116856	116811		
	125	139.7					158		2.9	2.9	5.8	4.23	116859	116814		
	150	168.3					172	250				5.02	116862	116817		
	175	193.7					185		3	3	6	5.36	116865	116820		
	200	219.1					198					5.58	116868	116823		
T-profile 100	25	33.7	30	5	100	105	122	200	0.5	0.5	1	3.61	116611	116581		
	32	42.4					126		0.6	0.6	1.2	3.64	116614	116584		
	40	48.3					129					3.66	116617	116587		
	50	60.3	40	6		106	136		1.1	1.1	2.2	4.045	116620	116590		
	65	76.1					144		1.3	1.3	2.6	4.105	116627	116593		
	80	88.9					150					4.195	116630	116596		
	100	114.3	50	8		108	165		2.8	2.8	5.6	5.18	116602	116566		
	125	139.7					178		3	3	6	5.37	116605	116569		
	150	168.3					192	250	3.3	3.3	6.6	6.44	116624	116572		
	175	193.7					205		3.5	3.5	7	6.78	116633	116575		
	200	219.1					218		3.7	3.7	7.4	7.01	116608	116578		

Ordering example: T-section slide guide made from S235JR (St37) with 1 pipe clamp, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outside diameter of 60.3 mm.

Part no.: 116590, Type: TP100-1-W37-OF-SF-60.3



Pipe guides with polyamide sliding surface as well as other versions available upon request.