

Pipe slides type TP-2


with two pipe clamps, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 75 mm for type TP80-2
- For insulation thicknesses up to 90 mm for type TP100-2

Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

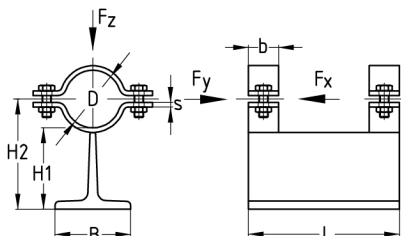

Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

Type	Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Design W37-OR-SG	Design W37-OF-SF	Sales unit	Pack unit
			b	s	B	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]		Part no.	Part no.		
T-profile 80	25	33.7	30	5	80	85	102	200	1.1	1.1	2.2	2.8	117023	116960	1	Pieces
	32	42.4					106		1.2	1.2	2.4	2.86	117026	116969		
	40	48.3					109		1.4	1.4	2.8	2.88	117029	116972		
	50	60.3	40	6		86	116		2.3	2.3	4.6	3.55	117032	116978		
	65	76.1					124		2.5	2.5	5	3.71	117035	116984		
	80	88.9					130		2.8	2.8	5.6	3.89	117038	116990		
	100	114.3	50	8	88	145	5	5	10	5.93	117008	116930				
	125	139.7				158	5.2	5.2	10.4	6.4	117011	116936				
	150	168.3				172	250	5.4	5.4	10.8	7.485	117014	116942			
	175	193.7				185					8.04	117017	116948			
	200	219.1	198	8.49	117020	116954										
T-profile 100	25	33.7	30	5	100	105	122	200	0.9	0.9	1.8	3.94	116784	116716		
	32	42.4					126		1.1	1.1	2.2	4	116787	116722		
	40	48.3					129		1.3	1.3	2.6	4.05	116790	116727		
	50	60.3	40	6		106	136		2	2	4	4.69	116793	116733		
	65	76.1					144		2.3	2.3	4.6	4.85	116796	116739		
	80	88.9					150		5	5.03	116799	116745				
	100	114.3	50	8	108	165	5.5	5.5	11	7.07	116769	116686				
	125	139.7				178	6	6	12	7.46	116772	116692				
	150	168.3				192	250	6.5	6.5	13	8.78	116775	116698			
	175	193.7				205		7	7	14	9.46	116778	116704			
	200	219.1	218	7.4	7.4	14.8	9.91	116781	116710							

Ordering example: T-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 60.3 mm.

Part no.: 116733, Type: TP100-2-W37-OF-SF-60.3



Pipe guides with polyamide sliding surface as well as other versions available upon request.