

Guide angles



untreated

Application

- Guide angle for (on site) welding onto the supporting structure for guidance and to prevent lift-off pipe slides
- Individual applications in combination with all pipe slides

Your advantages

- Two versions available

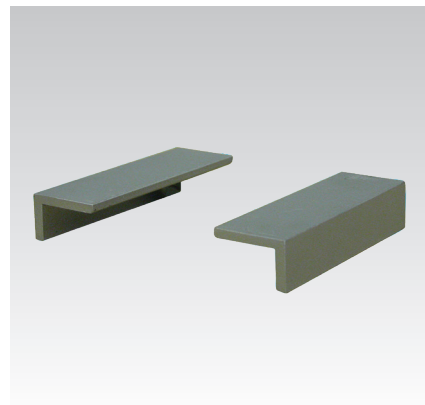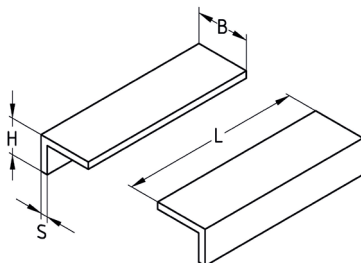

Features

Material	Code for material	Surface	Code for surface
S235JR (St37)	W37	untreated	OR

Type	Design	Code	Dimensions [mm]				Content [pieces/set]	Weight [kg]	Part no.	Sales unit	Pack unit
L-30	untreated	W37-OR	B	H	L	S	2	0.159	108999	1	Pieces
L-40			30	20	100	4		0.212	109000	2	



Guide angles are always supplied as pairs in untreated condition. Corrosion protection is made on-site.