

Duct fixing angles

with insulator, galvanised

Application

- Easy to install suspension for air ducts

Your advantages

- Incorporated highly-elastic vibration-isolating element
- Excellent alignment and height adjustment via the threaded rods
- Design as angle and twin-angle
- Various attachment options to air duct with rivets, self-drilling screws or bolts up to M8 in the oblong hole
- Direct attachment to air duct possible
- Average vibration reduction of 17 dB(A)

Features




Type	Max. recommended load [N]	Average vibration reduction [dB(A)]
Type I	230	16
Type II	800	17
Type III		





Duct fixing twin-angles




Duct fixing angles

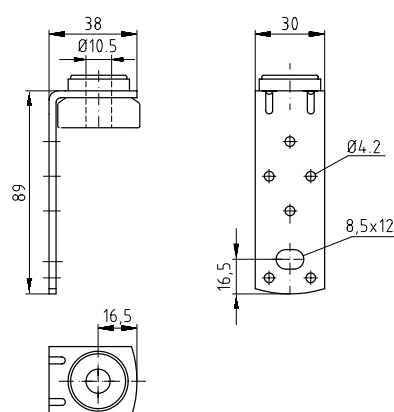


Duct fixing angles Type I

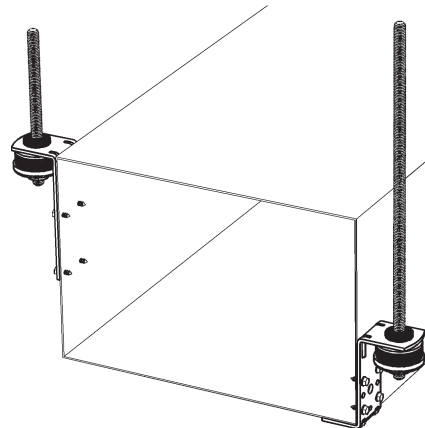


Duct fixing angles Type II



Duct fixing angles Type III



Duct fixing twin-angles Type I

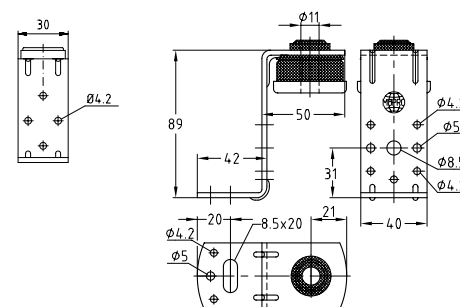

Duct fixing twin-angles Type II

Design	Type	Part no.	Sales unit	Pack unit
Duct fixing angles with insulating part	Type I	116579	100	Pieces
	Type II	116635	50	
	Type III	172084		
Duct fixing twin-angles with insulating part	Type I	116543	100	
	Type II	116546	50	
Rubber washer	12 x 24 x 4 mm	113092	1	



Duct fixing angles and twin-angles are also available in other lengths.