


## Nylon plugs

## Application

- For anchorages in concrete, lime sand brick, solid brick, natural stone (hard), gypsum full brick

## Your advantages

- Excellent screw guidance, no breaking out at the side
- Design prevents premature splaying
- Plugs do not buckle
- Staggered tooth profile provides high extraction force
- High-quality nylon - no recycled material used
- Also available in solid plastic case

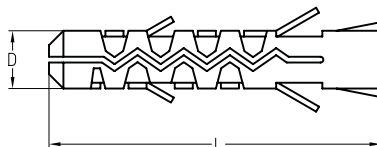

## Features

Length L [mm]	Drilling diameter D [mm]	Screw diameter [mm]	Max. recommended load			Part no.	Sales unit	Pack unit
			Concrete B25 [N]	Solid brick [N]	Lightweight concrete (gas concrete, aerated concrete, pumice) [N]			
30	6	3.5 - 5	600	400	60	107367	100	Pieces
50						107374		
40	8	4.5 - 6	850	600	90	107370	50	
65		4.5 - 8				107375		
50	10	6 - 8	1,400	800	200	107359	25	
60	12	8 - 10	1,800	1,000	400	107361		
70	14	10 - 12	2,600	1,300	500	107363	20	

- ⚠ Screw type wood-/chipboard screw Ø mm 2.6-4.  
Screw type metric Ø mm M3.

## Nylon plugs

in stackable plastic box with lid

Length L [mm]	Drilling diameter D [mm]	Screw diameter [mm]	Content [pieces/box]	Part no.	Sales unit	Pack unit
30	6	3.5 - 5	5,600	107368	1	Pieces
40	8	4.5 - 6	2,800	107371		
50	10	6 - 8	1,400	107360		
60	12	8 - 10	700	107362		
70	14	10 - 12	560	107364		

