


Anchor rods for injection anchors XV Plus

for solid and perforated blocks

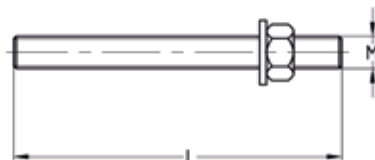

Anchor rod for solid and perforated blocks type VMU-A, strength class 5.8

Features



Size	Type	Solid block without perforated sleeve		Solid and perforated block with perforated sleeve		External thread M	Length L [mm]	Surface galvanised Part no.	Surface V4A Part no.	Sales unit	Pack unit
		Drilling diameter x depth [mm]	Clamping thickness t _{fix} [mm]	Drilling diameter x depth [mm]	Clamping thickness t _{fix} [mm]						
M8 x 100 mm	VMU-A	10 x 80	10	12 x 80	10	M8	100	106277	106276	10	Pieces
M8 x 130 mm			40		40		130	106281			
M10 x 110 mm		12 x 90	10	16 x 85	15	M10	110	106253	106252		
M10 x 150 mm			50		55		150	106257	106256		
M10 x 165 mm			65		70		165	106259	106258		
M12 x 135 mm		14 x 90	20	20 x 85	35	M12	135	163163	163165		
M12 x 175 mm			60		75		175	163164			



Anchor rods in additional dimensions, threaded rods type VM-A with inspection certificate 3.1 according to EN 10204 as well as highly corrosion resistant threaded rods in stainless steel HCR available upon request.



Please refer to chapter „Technical information“ for load values and consumption quantities for mortar when used in solid and perforated blocks.

